


REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	04/11/07	
B	CORRECT CABLE SPEC. TO OFNR	10/24/11	

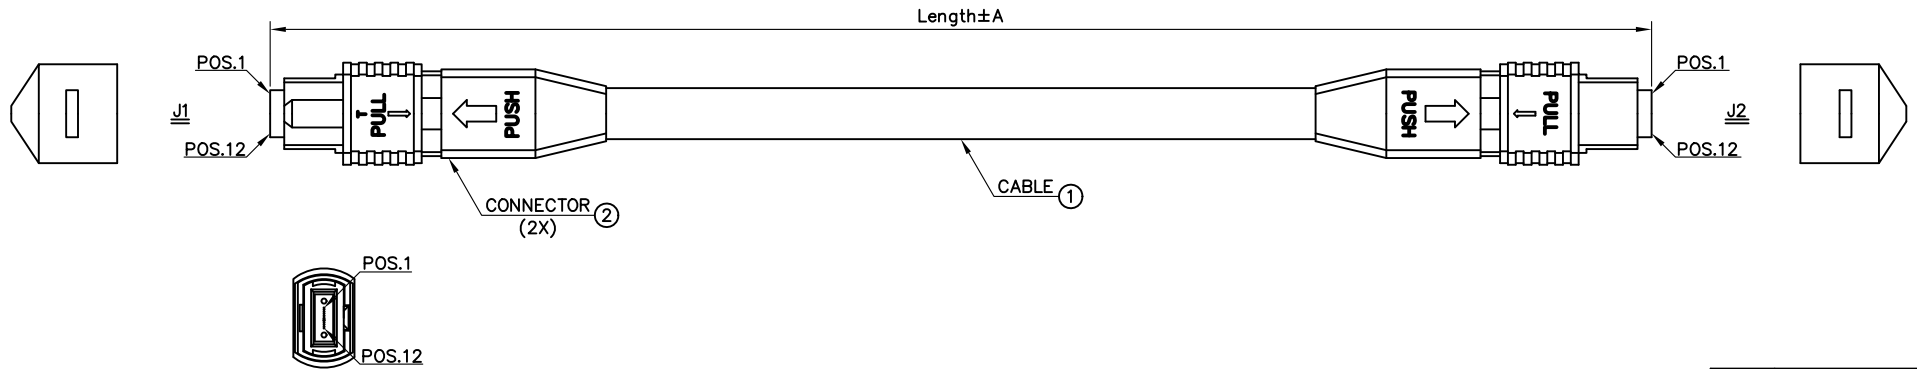

GCFGSPPL50	50	0.15
GCFGSPPL35	35	0.15
GCFGSPPL20	20	0.15
GCFGSPPL15	15	0.15
GCFGSPPL10	10	0.15
GCFGSPPL05	5	0.10
ITEM NO.	LENGTH(M)	TOLERANCE(M)

FIBER	JACKET COLOR
1	BLUE
2	ORANGE
3	GREEN
4	BROWN
5	SLATE
6	WHITE
7	RED
8	BLACK
9	YELLOW
10	VIOLET
11	ROSE
12	AQUA

NO.	ITEM	Q'TY	DESCRIPTION
2	CONNECTOR	2PCS	MPO, FEMALE, MULTI-MODE, BEIGE HOUSING, BLACK BOOT.
1	CABLE	1PC	OPTICAL FIBER, MULTI-MODE, OM3, 50/125, 12 CORES RIBBON CABLE, TIGHT, AQUA, PVC (OFNR) JACKET.

NOTES:

- ASSEMBLY SHALL BE REFERENCE TO BELLCORE GR-326 STANDARD.
- INSERTION LOSS:
MULTIMODE: <0.75dB (1310nm)
- OPERATING TEMPERATURE: -40°C TO +70°C

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE		CABLESYS		14700 E ALONDRA BLVD, LA MIRADA, CA 90638		WWW.CABLESYS.COM	
DECIMALS	A.C.	SIZE	A	FILE NO.	OFFSHELF CABLE\GCFGSPPLXX	REV.	B
.X	+/- .050			DRAFTSMAN	N.T.	UNIT	MM
.XX	+/- .010			APPROVED BY	N.T.	SCALE	NTS
.XXX	+/- .005			DATE	04/11/07	PAGE NO.	1/1
DO NOT SCALE DRAWING				PATCHCORD, MPO/FEMALE-MPO/FEMALE, MM, 10G LAZER OPTIMIZED, 50/125, OFNR 12F RIBBON CABLE			
				DATE	04/11/07	DWG NO.	FGSPPLXX

Approved by: _____ Title: _____ Date: _____