


REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	07/10/09	

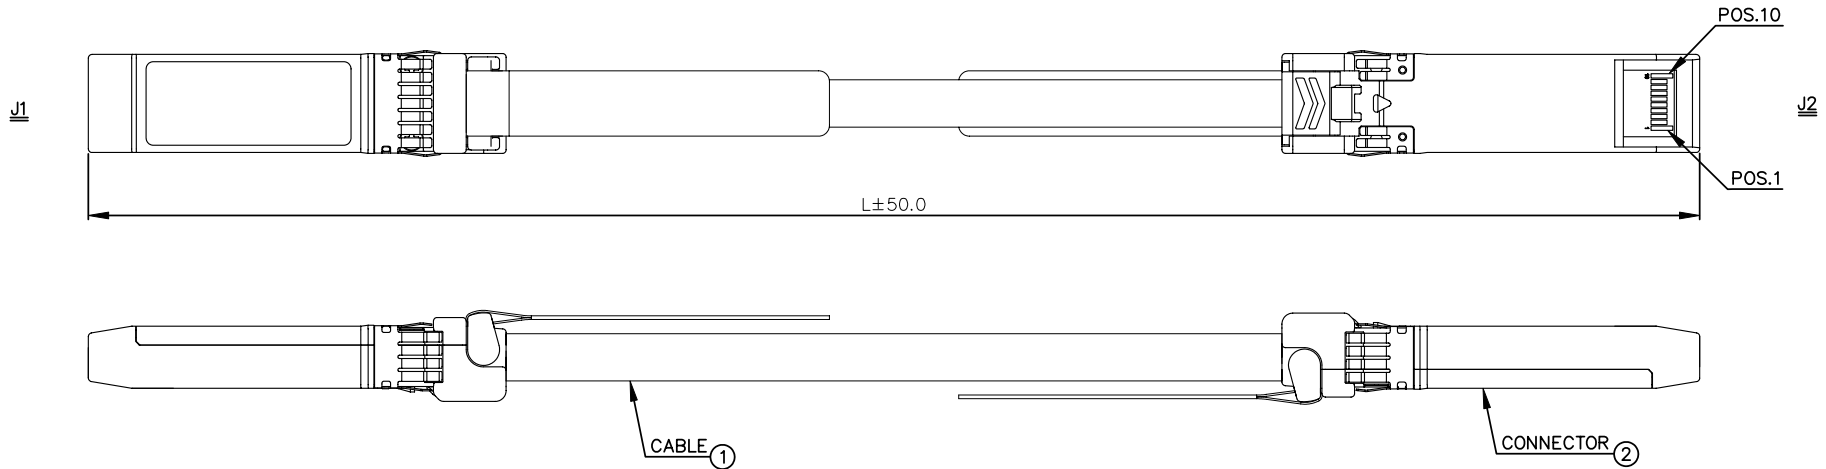

WIRING CHART			
P1 END		P2 END	
P1 PAD	SIGNAL	P2 PAD	SIGNAL
12	RX-	19	TX-
13	RX+	18	TX+
GROUND		GROUND	
18	TX+	13	RX+
19	TX-	12	RX-
GROUND		GROUND	

GC55722003	3M
GC55722002	2M
GC55722001	1M
PART NO.	LENGTH

NOTES:
 1. FOR 10G.
 2. PACKAGING: 1PC/BAG.

NO.	ITEM	DESCRIPTION
2	CONNECTOR	P1&P2: SFP+ MODULE 1. HOOD: ZINC DIE CASTING, NICKEL PLATING. 2. LATCH: PC RESIN UL94V, COLOR IN BLACK. 3. P.C.B.: 4 LAYERS, FR4. 30U" GOLD ON GOLDEN FINGERS. 4. SERIAL ID IC: AT24C02B OR EQUIVALENT.
1	CABLE	CONDUCTOR: 24AWG SOLID SILVER PLATED COPPER. INSULATION: FOAM POLYOLEFIN. PAIR: 2 SINGLES LAID FLAT AND PARALLEL. PAIR DRAIN WIRE: 26AWG SOLID SILVER PLATED COPPER. PAIR SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE PACING OUT, 25% OVERLAP. COLOR=YELLOW. INNER SHIELD: ALUMINUM/POLYESTER TAPE, ALUMINUM SIDE PACING OUT, 25% OVERLAP. OUTER SHIELD: 36AWG TIN PLATED COPPER BRAID, 85% COVERAGE. DIAMETER: 6.86MM NOMINAL. COLOR= BLACK. PRINT LEGEND: "TYPE CL2 75°C 24AWG (UL) MADISON CABLE CSA AWM II A/B 75C 30V FT4 TurboTwin™ 10G RoHS COMPLIANT" DIFFERENTIAL IMPEDANCE: 100±5 OHMS @TDR UL LISTING: TYPE CL2 AS SPECIFIED IN ARTICLE 725 OF THE NATIONAL ELECTRICAL CODE. TurboTwin™

UNLESS OTHERWISE SPECIFIED
 DIMENSION TOLERANCES ARE

DECIMALS	ANGULAR
.X +/- .050	+/- 0.5
.XX +/- .010	
.XXX +/- .005	

DO NOT SCALE DRAWING

CABLESYS

14700 E ALONDRA BLVD, LA MIRADA, CA 90638 WWW.CABLESYS.COM

SFP+ / SFP+ PASSIVE CABLE ASSY

DESIGNER	LAI	SIZE	A	FILE NO.	OFF SHELF CABLE/GC55722000	REV.	A
DRAFTSMAN	H.W	UNIT	MM	PAGE NO.	1/1	ITEM NO.	GC55722000
APPROVED BY		SCALE	NTS	DATE	07/10/09	DWG NO.	55722000

Approved by: _____ Title: _____ Date: _____