


REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	10/20/04	

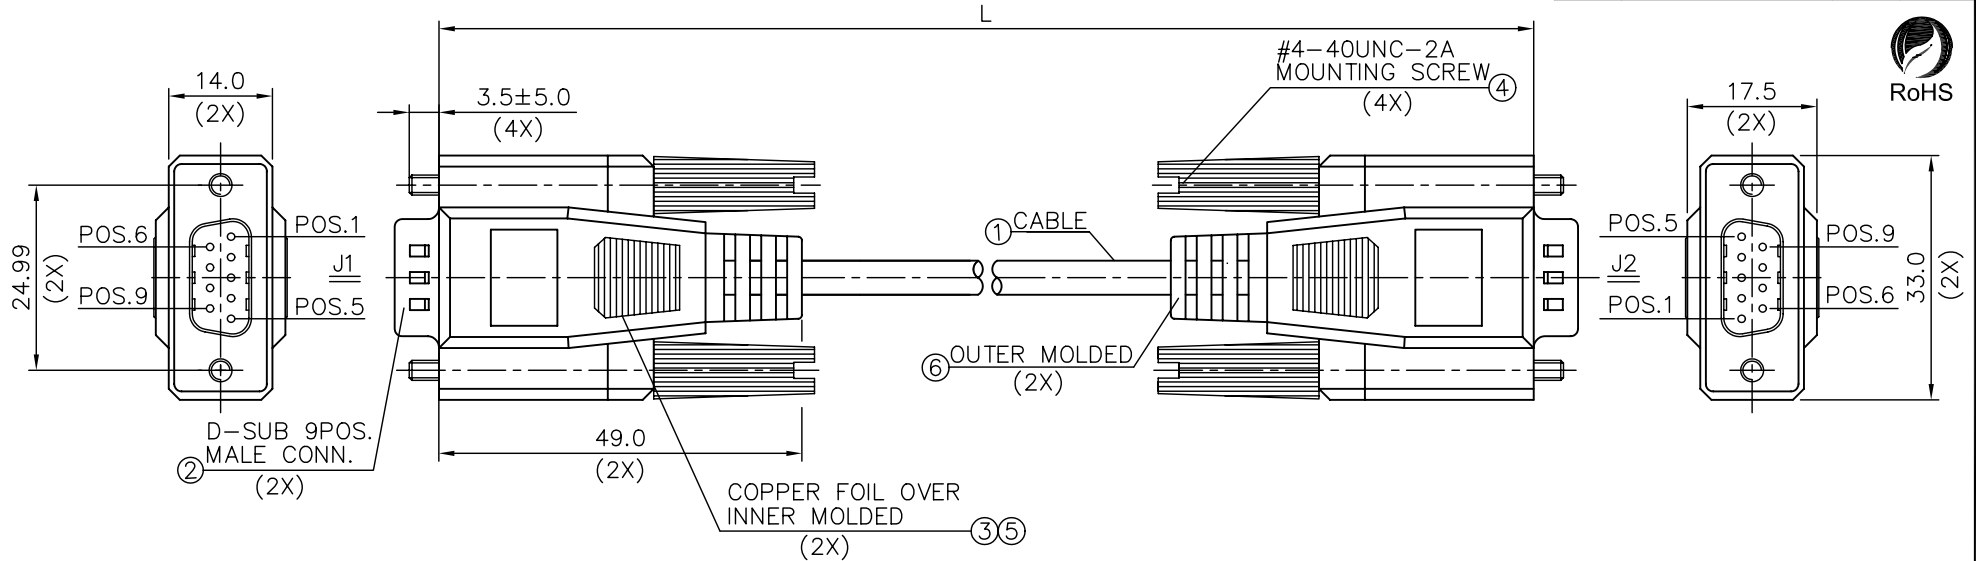

SHELL	SHELL
9	9
8	8
7	7
6	6
5	5
4	4
3	3
2	2
1	1
J1	J1

WIRE CONNECTION TABLE

GC72801025	25'
GC72801015	15'
GC72801010	10'
GC72801006	6'
PART NUMBER	LENGTH

6	OUTER MOLDED	44gm	PVC UL94V-0 SHORE: A 85±3 COLOR: BEIGE(600-GRY-004)
5	INNER MOLDED	12gm	PE, COLOR: NATURAL
4	MOUNTING SCREW	4PCS	#4-40UNC-2A NICKEL PLATED KNOB: ABS COLOR: BEIGE(600-GRY-004)
3	COPPER FOIL	2PCS	W=32.0MM, T=0.025MM, L=50.0MM
2	D-SUB 9POS. MALE CONN.	2PCS	CONTACT: COPPER ALLOY, GOLD FLASH, INSULATOR: PBT, UL94V-0, COLOR: BLACK SHELL: STEEL, NICKEL PLATED
1	CABLE	1PC	#28X9C + AL/MYLAR + DRAIN WIRE + JACKET COLOR: BEIGE(600-GRY-004)
NO.	ITEM	Q'TY	DESCRIPTION

NOTES:

1. ALL DIMENSIONS ARE "MM".
2. ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED.
3. COPPER FOIL SHALL BE SOLDERED TO CONNECTER SHELL FULL AROUND AND ANY SEAM.
4. INSULATION RESISTANCE: 50M OHMS/250V DC MIN.

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE		 14700 E ALONDRA BLVD, LA MIRADA, CA 90638 WWW.CABLESYS.COM					
DECIMALS	ANGULAR						
.X +/- .050	+/- 0.5	DB9M TO DB9M CABLE ASSEMBLY					
.XX +/- .010							
.XXX +/- .005							
DO NOT SCALE DRAWING							
DESIGNER	T.L.	SIZE	A	FILE NO	NSPEC\OFF SHELF CABLE\GC72801XXX	REV.	A
DRAFTSMAN	T.L.	UNIT	MM	PAGE NO.	1/1	ITEM NO.	GC72801XXX
APPROVED BY		SCALE	NTS	DATE	10/20/04	DWG NO.	72801XXX

Approved by: _____ Title: _____ Date: _____