


REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	11/06/2007	

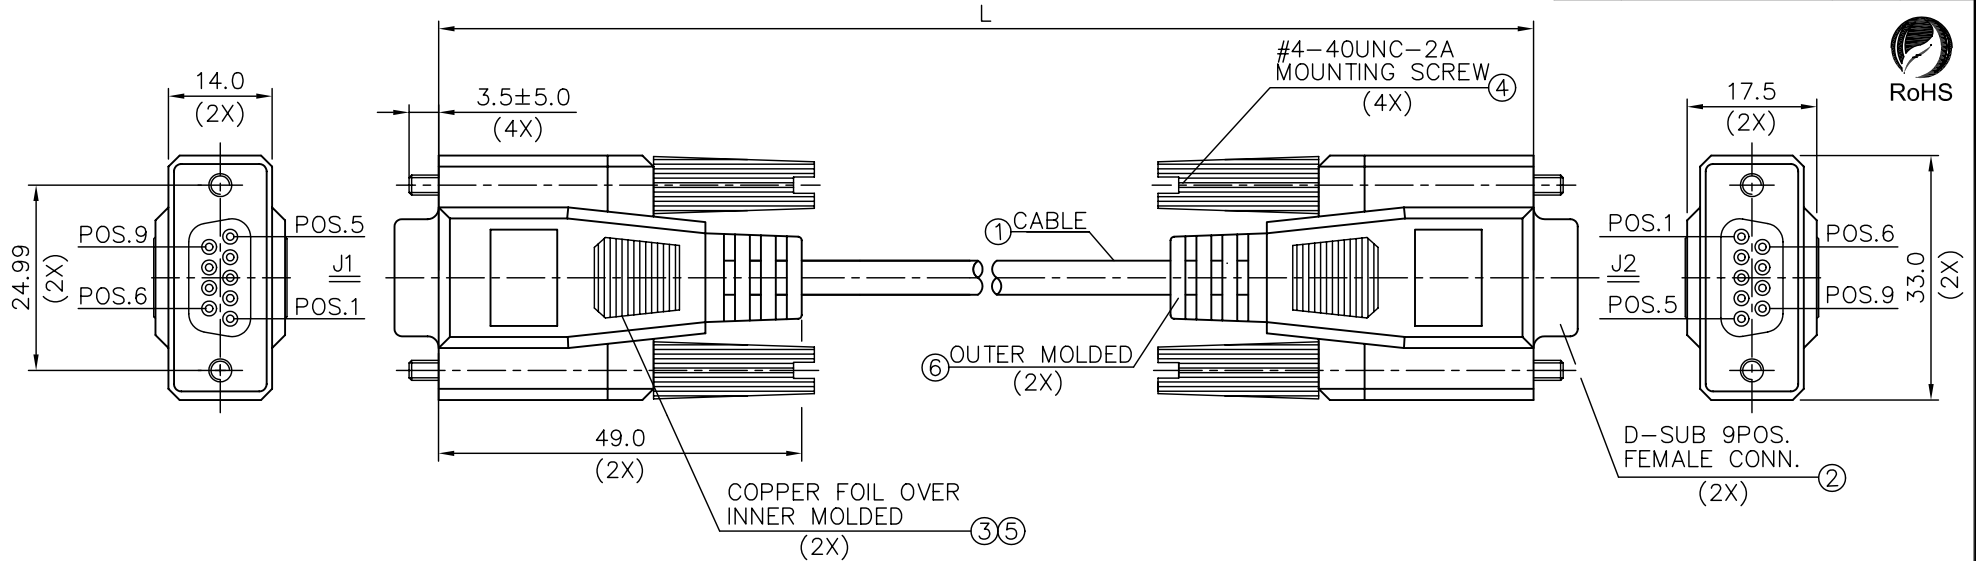

SHELL	SHELL
9	9
8	8
7	7
6	6
5	5
4	4
3	3
2	2
1	1
J1	J1

WIRE CONNECTION TABLE

GC72803025	25'
GC72803010	10'
GC72803006	6'
PART NUMBER	LENGTH

6	OUTER MOLDED	44gm	PVC UL94V-0 SHORE: A 85±3 COLOR: BEIGE(600-GRY-004)
5	INNER MOLDED	12gm	PE, COLOR: NATURAL
4	MOUNTING SCREW	4PCS	#4-40UNC-2A NICKEL PLATED KNOB: ABS COLOR: BEIGE(600-GRY-004)
3	COPPER FOIL	2PCS	W=32.0MM, T=0.025MM, L=50.0MM
2	D-SUB 9POS. FEMALE CONN.	2PCS	CONTACT: COPPER ALLOY, GOLD FLASH, INSULATOR: PBT, UL94V-0, COLOR: BLACK SHELL: STEEL, NICKEL PLATED
1	CABLE	1PC	#28X9C + AL/MYLAR + DRAIN WIRE + JACKET COLOR: BEIGE(600-GRY-004)
NO.	ITEM	Q'TY	DESCRIPTION

UNLESS OTHERWISE SPECIFIED
DIMENSION TOLERANCES ARE

DECIMALS	ANGULAR
.X +/- .050	+/- 0.5
.XX +/- .010	
.XXX +/- .005	

DO NOT SCALE DRAWING

CABLESYS

14700 E ALONDRA BLVD, LA MIRADA, CA 90638

WWW.CABLESYS.COM

DB9F TO DB9F CABLE ASSEMBLY

DESIGNER	T.L.	SIZE	A	FILE NO.	SPEC\OFF SHELF CABLE\GC72803XXX	REV. A
DRAFTSMAN	T.L.	UNIT	MM	PAGE NO.	1/1	ITEM NO. GC72803XXX
APPROVED BY		SCALE	NTS	DATE	11/06/2007	DWG NO. 72803XXX

NOTES:

1. ALL DIMENSIONS ARE "MM".
2. ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED.
3. COPPER FOIL SHALL BE SOLDERED TO CONNECTER SHELL FULL AROUND AND ANY SEAM.
4. INSULATION RESISTANCE: 50M OHMS/250V DC MIN.

Approved by: _____ Title: _____ Date: _____