


| REV | DESCRIPTION        | Date     | APPROVED |
|-----|--------------------|----------|----------|
| A   | PRODUCTION RELEASE | 11/23/10 |          |

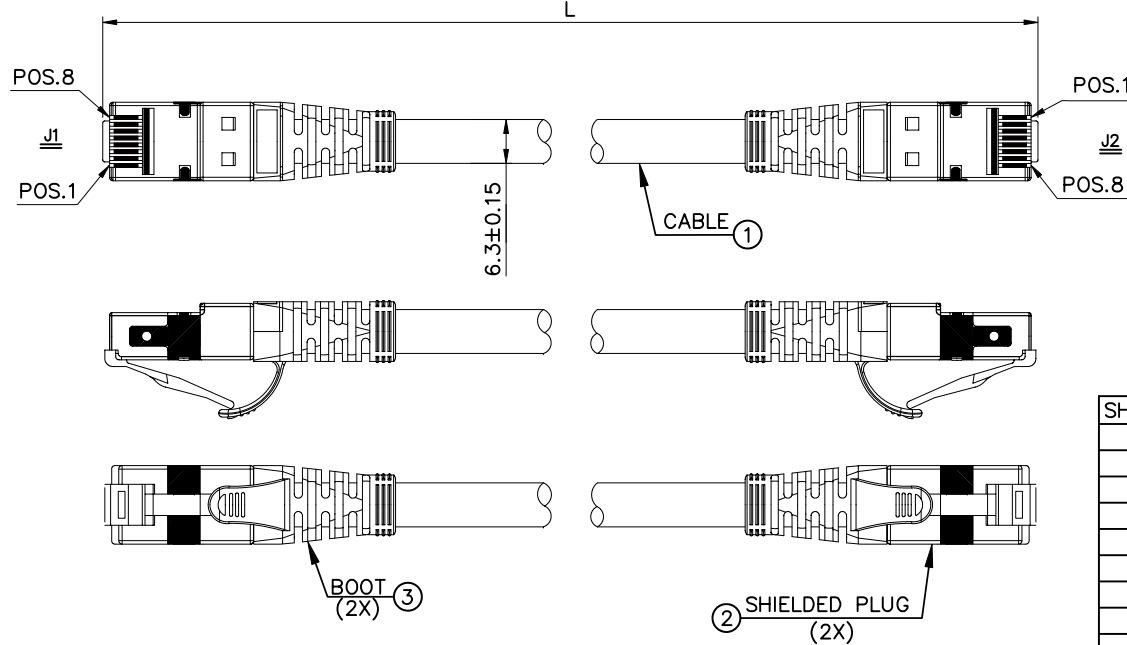

| SHELL | DRAIN WIRE   | SHELL     |
|-------|--------------|-----------|
| 8     | BROWN        | TWISTED 8 |
| 7     | WHITE/BROWN  | PAIR 7    |
| 5     | WHITE/BLUE   | TWISTED 5 |
| 4     | BLUE         | PAIR 4    |
| 6     | GREEN        | TWISTED 6 |
| 3     | WHITE/GREEN  | PAIR 3    |
| 2     | ORANGE       | TWISTED 2 |
| 1     | WHITE/ORANGE | PAIR 1    |
| J1    | WIRE COLOR   | J2        |

WIRE CONNECTION TABLE

| CBS P/N       | DIM "L"                | BAG SIZE |
|---------------|------------------------|----------|
| GCP08SSD25-XX | 7620.0±50.8 (25'±2")   | 9"x12"   |
| GCP08SSD15-XX | 4572.0±38.1 (14'±1.5") | 9"x12"   |
| GCP08SSD10-XX | 3048.0±38.1 (10'±1.5") | 9"x12"   |
| GCP08SSD07-XX | 2133.6±25.4 (7'±1")    | 6"x8"    |
| GCP08SSD05-XX | 1524.0±25.4 (5'±1")    | 6"x8"    |
| GCP08SSD03-XX | 914.4±25.4 (3'±1")     | 6"x8"    |
| GCP08SSD01-XX | 304.8±12.7 (1'±0.5")   | 6"x8"    |

PART NUMBER TABLE

| COLOR CODE | COLOR  |
|------------|--------|
| YL         | YELLOW |
| WH         | WHITE  |
| BL         | BLUE   |
| BK         | BLACK  |

COLOR TABLE

| NO. | ITEM          | Q'TY | DESCRIPTION   |
|-----|---------------|------|---|
| 3   | BOOT          | 2PCS | PVC, COLOR:SEE TABLE  |
| 2   | SHIELDED PLUG | 2SET | SHIELDED MODULAR PLUG, 8P8C<br>CONTACT: PHOSPHOR BRONZE, 50u" GOLD PLATED<br>INSULATOR: POLYCARBONATE, UL94V-2<br>COLOR: NATURAL  |
| 1   | CABLE         | 1PC  | CATEGORY 6A CABLE 26AWG 4-PAIRS,<br>INDIVIDUAL SHIELDED PAIR+DRAIN WIRE<br>PVC JACKET, OD=6.3±0.15MM<br>UL CM & CSA FT4<br>FREQUENCY: SPECIFIED AND TESTED TO 500MHZ<br>COLOR: SEE TABLE<br>JACKET MARKING AND ADDITIONAL INFO:<br>SEE XPCS4PHAXX |

NOTES:

- PACKAGING:
  - 1 PC/BAG, TYPE I PER "PKBAG", SIZE: SEE PART NUMBER TABLE, LABEL ON BAG PER "PKLABEL"
  - 10 BAGS/OUTER BAG, SIZE TO FIT, LABEL ON BAG PER "LABEL 1"
  - MASTER CARTON: SIZE 18"X13.5"X9.75", PRINTING AND LABELING PER PKCARTON
- ALL DIMENSIONS ARE "MM"
- ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED
- INDIVIDUALLY TEST EACH CABLE TO MEET TIA 568-C.2 CHANNEL REQUIREMENT
- CONFORMITY WITH ISO/IEC, EN & TIA/EIA SCREEN CONTININITY CLASS EA/CATEGORY 6A, THREE CONNECTOR CHANNEL.

|  |         |  |     |          |                               |          |               |
|--|---------|--|-----|----------|-------------------------------|----------|---------------|
| UNLESS OTHERWISE SPECIFIED<br>DIMENSION TOLERANCES ARE |         | <h1 style="text-align: center;">CABLESYS</h1> <p style="text-align: center;">14700 E ALONDR A BLVD, LA MIRADA, CA 90638      WWW.CABLESYS.COM</p> <h2 style="text-align: center;">CAT6A U/FTP SHIELDED PATCH CABLE W/SR</h2> |     |          |                               |          |               |
| DECIMALS   | ANGULAR |  |     |          |                               |          |               |
| .X      +/- .050                                       | +/- .05 | DO NOT SCALE DRAWING   |     |          |                               |          |               |
| .XX     +/- .010                                       |         |  |     |          |                               |          |               |
| .XXX   +/- .005  |         |  |     |          |                               |          |               |
| DESIGNER   | T.L.    | SIZE   | A   | FILE NO. | OFF SHELF CABLE\GCP08SSDXX-XX | REV.     | A             |
| DRAFTSMAN  | H.W.    | UNIT   | MM  | PAGE NO. | 1/1                           | ITEM NO. | GCP08SSDXX-XX |
| APPROVED BY  |         | SCALE  | NTS | DATE     | 11/23/10                      | DWG NO.  | P08SSDXX-XX   |

Approved by: \_\_\_\_\_ Title: \_\_\_\_\_ Date: \_\_\_\_\_