



REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	01/22/08	
B	MODIFY SPEC.	05/11/09	

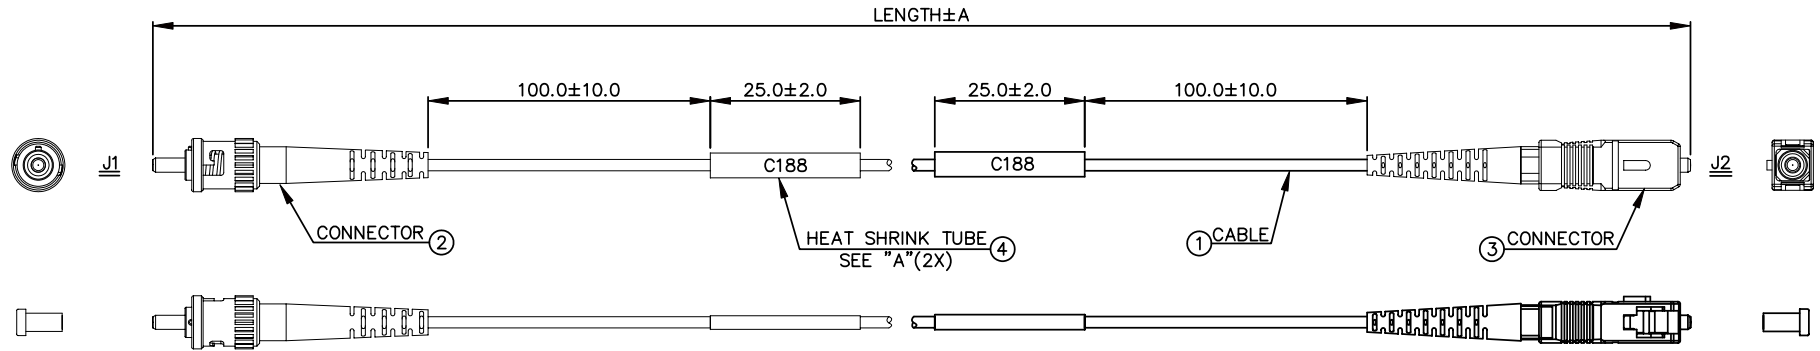

TOLERANCE

6~**	0.15
3~5	0.10
2	0.05
0.6~1	0.04
0~0.5	0.03
LENGTH(M)	A(M)

GCFA1TCM**-M	**
GCFA1TCM01-M	1
CABLESYS P/N	LENGTH (M)

NOTE: "\*\*\*": 01,02,03...

ⓑ NOTES:

- NEW PRODUCTS SHALL BE REFERENCE TO BELLCORE GR-326 STANDARD.
- INSERTION LOSS: <=0.2dB TYPICAL (1300nm)

4	HEAT SHRINK TUBE	2PCS	COLOR=BLACK.
3	CONNECTOR	1PC	SC, SIMPLEX, MULTI-MODE,BLUE COUPLING & BOOTS.
2	CONNECTOR	1PC	ST, SIMPLEX, MULTI-MODE BLACK BOOTS.
1	CABLE	1PC	OPTICAL FIBER, MULTI-MODE, 62.5/125, SIMPLEX, Ø2.0MM, TIGHT, ORANGE, PVC JACKET.
NO.	ITEM	Q'TY	DESCRIPTION

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE

DECIMALS	ANGULAR
.X +/- .050	+/- 0.5
.XX +/- .010	
.XXX +/- .005	

DO NOT SCALE DRAWING

**CABLESYS**

14700 E ALONDRÁ BLVD, LA MIRADA, CA 90638 WWW.CABLESYS.COM

FIBER JUMPER 62.5/125µm MULTIMODE  
SIMPLEX ST TO SC

DESIGNER	A.C.	SIZE	A	FILE NO.	OFF SHELF CABLE\FIBER\GCFA1TCMXX	REV.	B
DRAFTSMAN	H.W.	UNIT	MM	PAGE NO.	1/1	ITEM NO.	GCFA1TCMXX
APPROVED BY		SCALE	NTS	DATE	01/22/08	DWG NO.	FA1TCMXX

Approved by: \_\_\_\_\_ Title: \_\_\_\_\_ Date: \_\_\_\_\_