



REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	09/29/08	

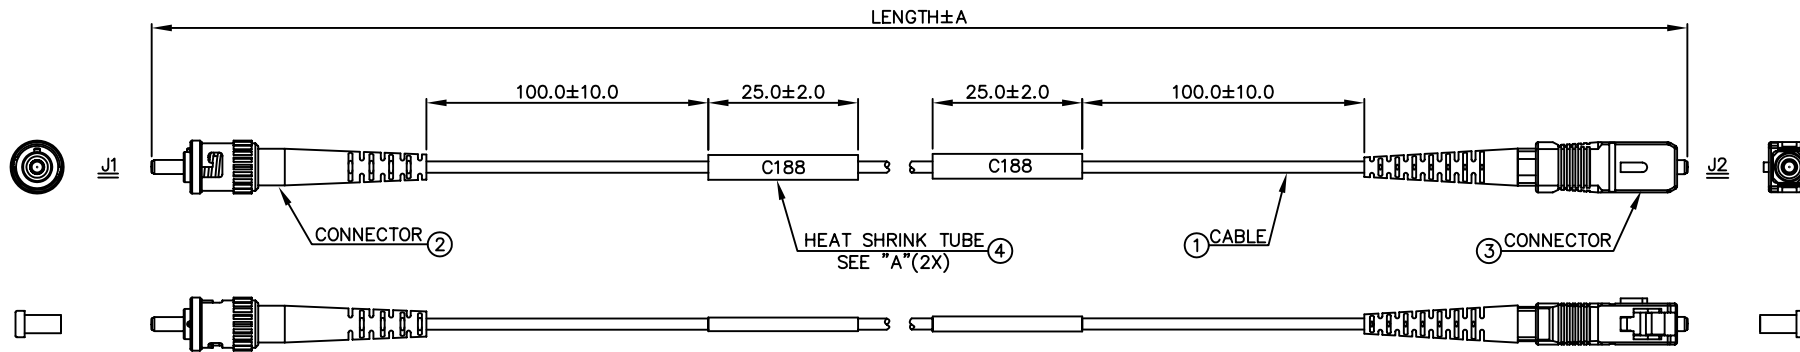

TOLERANCE

6~**	0.15
3~5	0.10
2	0.05
0.6~1	0.04
0~0.5	0.03
LENGTH(M)	A(M)

GCF A1TCS** -M	**
GCF A1TCS01 -M	1
CABLESYS P/N	LENGTH (M)

NOTE: "**": 01,02,03...

NO.	ITEM	Q'TY	DESCRIPTION
4	HEAT SHRINK TUBE	2PCS	COLOR=BLACK.
3	CONNECTOR	1PC	SC, SIMPLEX, SINGLE-MODE, BLUE COUPLING & BOOT
2	CONNECTOR	1PC	ST, SIMPLEX, SINGLE-MODE, YELLOW BOOT.
1	CABLE	1PC	OPTICAL FIBER, SINGLE-MODE, 9/125, SIMPLEX, Ø2.0MM, TIGHT, YELLOW, PVC JACKET.

NOTES:

- NEW PRODUCTS SHALL BE REFERENCE TO BELLCORE GR-326 STANDARD.
- INSERTION LOSS: ≤0.2dB TYPICAL (1300nm)
- RETURN LOSS: ≥55dB (1310nm)
- CABLE MARKING: BAYCON: "PLUS CORNING SMF-28 OPTICAL FIBER CABLE OFNR(UL)E201648 08/2006 ***** M"
KEY OPTICS: "PLUS CORNING SMF-28 OPTICAL FIBER CABLE OFNR(UL)E241104 08/2006 ***** M"

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE		<h1 style="text-align: center;">CABLESYS</h1> <p style="text-align: center;">14700 E ALONDRA BLVD, LA MIRADA, CA 90638 WWW.CABLESYS.COM</p>							
<p>DECIMALS ANGULAR</p> <p>.X +/- .050 +/- 0.5</p> <p>.XX +/- .010</p> <p>.XXX +/- .005</p>	<p>FIBER JUMPER SINGLEMODE SIMPLEX ST TO SC</p>								
DO NOT SCALE DRAWING		DESIGNER	A.C.	SIZE	A	FILE NO.	OFF SHELF CABLE\FIBER\GCF A1TCSXX	REV.	A
		DRAFTSMAN	H.W.	UNIT	MM	PAGE NO.	1/1	ITEM NO.	GCF A1TCSXX
		APPROVED BY		SCALE	NTS	DATE	09/29/08	DWG NO.	FA1TCSXX

Approved by: _____ Title: _____ Date: _____