


REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	04/04/07	
B	MODIFY SPEC.	05/11/09	
C	MODIFY LENGTH	09/25/09	

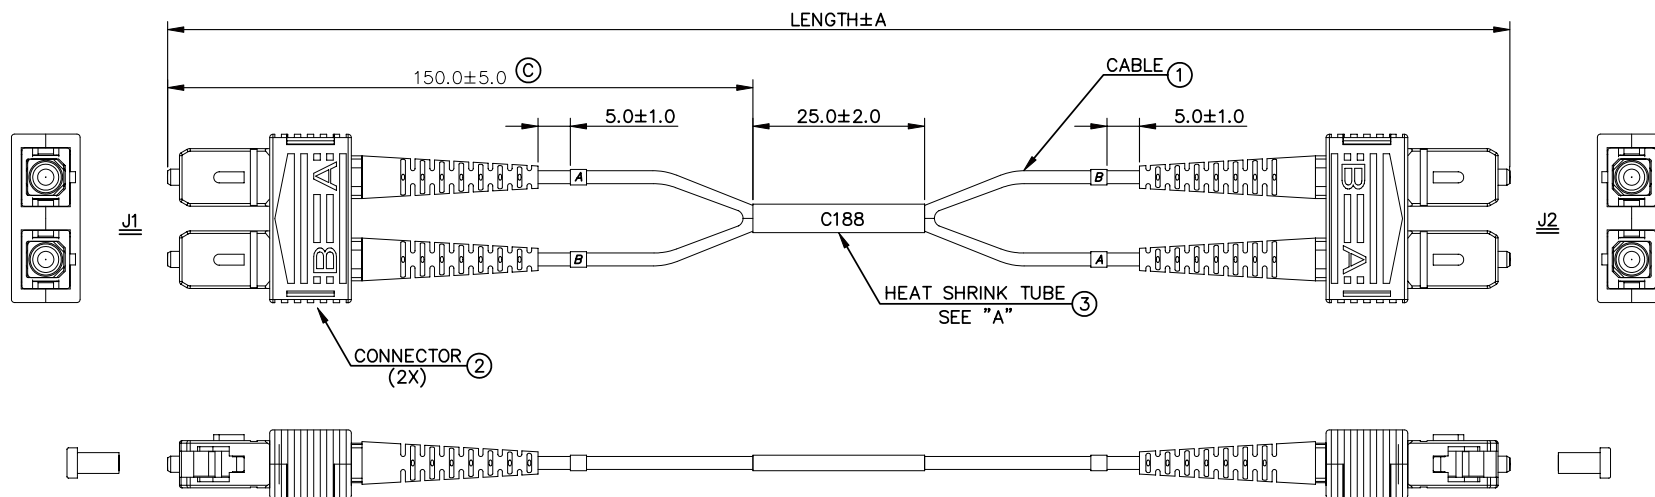


TOLERANCE

6~**	0.15
3~5	0.10
2	0.05
0.6~1	0.04
0~0.5	0.03
LENGTH(M)	A(M)

GCFAZCCM**-M	**
GCFAZCCM01-M	1
CABLESYS P/N	LENGTH (M)

NOTE: "**": 01,02,03...

B	_____	A
A	_____	B
J1	WIRE COLOR	J2
WIRE CONNECTION		



3	HEAT SHRINK TUBE	1PC	COLOR=BLACK.
2	CONNECTOR	2PCS	SC, DUPLEX, MULTI-MODE, BLUE COUPLING & BOOT & CLIP
1	CABLE	1PC	OPTICAL FIBER, MULTI-MODE, 62.5/125, DUPLEX, Ø2.0MM, TIGHT, ORANGE, PVC JACKET.
NO.	ITEM	Q'TY	DESCRIPTION

ⓑ NOTES:

- NEW PRODUCTS SHALL BE REFERENCE TO BELLCORE GR-326 STANDARD.
- INSERTION LOSS: <=0.2dB TYPICAL (1300nm)

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE		CABLESYS			
DECIMALS	ANGULAR	14700 E ALONDRA BLVD, LA MIRADA, CA 90638 WWW.CABLESYS.COM			
.X	+/- .050	FIBER JUMPER 62.5/125um MULTIMODE DUPLEX SC TO SC			
.XX	+/- .010	DO NOT SCALE DRAWING			
.XXX	+/- .005	DESIGNER	A.C.	SIZE	A
		DRAFTSMAN	H.W.	UNIT	MM
		APPROVED BY		SCALE	NTS
		FILE NO.	OFF SHELF CABLE\FIBER\GCFAZCCMXX-M	REV.	C
		PAGE NO.	1/1	ITEM NO.	GCFAZCCMXX-M
		DATE	04/04/07	DWG NO.	FAZCCMXX-M

Approved by: _____ Title: _____ Date: _____