



REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	10/23/08	
B	MODIFY SPEC.	05/11/09	
C	MODIFY LENGTH	09/30/09	

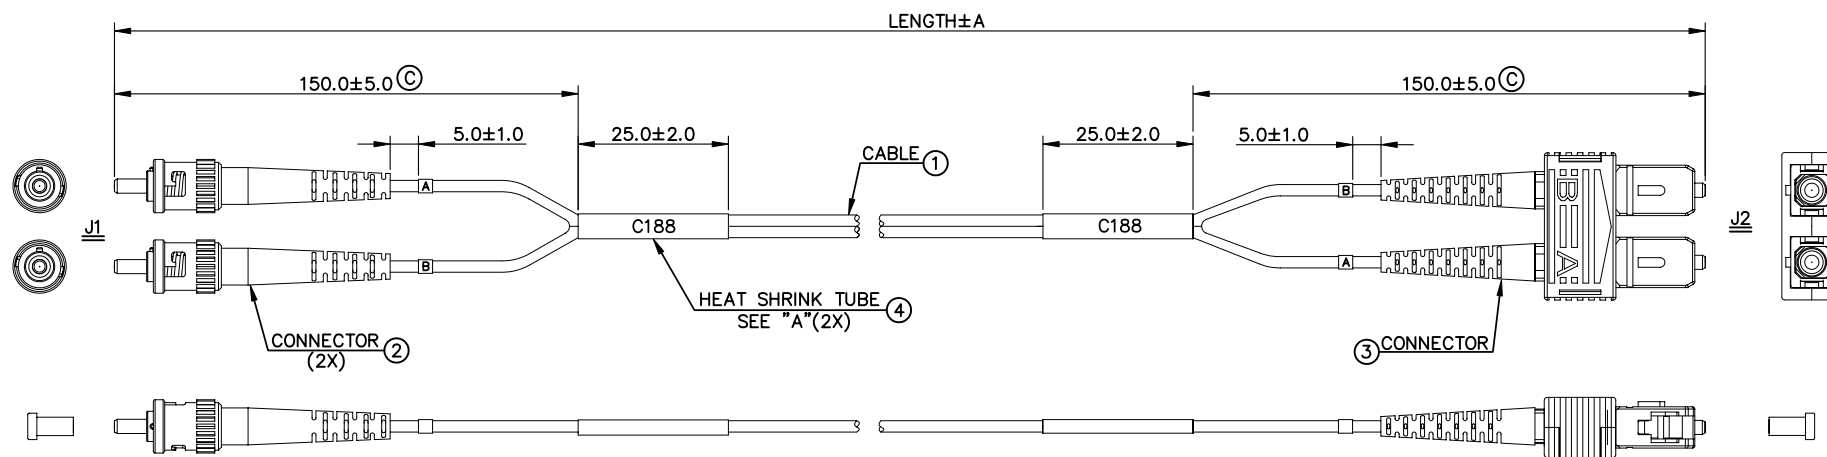

TOLERANCE

6~**	0.15
3~5	0.10
2	0.05
0.6~1	0.04
0~0.5	0.03
LENGTH(M)	A(M)

GCFAZTCS**-M	**
GCFAZTCS01-M	1
CABLESYS P/N	LENGTH (M)

NOTE: "\*\*": 01,02,03...

B	_____	A
A	_____	B
J1	WIRE COLOR	J2
WIRE CONNECTION		

ⓑ NOTES:

1. NEW PRODUCTS SHALL BE REFERENCE TO BELLCORE GR-326 STANDARD.
2. INSERTION LOSS: <=0.2dB TYPICAL (1300nm) 0.3dB MAX.
3. RETURN LOSS: >=55dB (1310nm)

4	HEAT SHRINK TUBE	2PCS	COLOR=BLACK.
3	CONNECTOR	1PC	SC, DUPLEX, SINGLE-MODE, BLUE COUPLING & BOOTS & CLIP.
2	CONNECTOR	2PCS	ST, SIMPLEX, SINGLE-MODE, YELLOW BOOT.
1	CABLE	1PC	OPTICAL FIBER, SINGLE-MODE, 9/125, DUPLEX, Ø2.0MM, TIGHT, YELLOW, PVC JACKET.
NO.	ITEM	Q'TY	DESCRIPTION

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE

DECIMALS	ANGULAR
.X +/- .050	+/- 0.5
.XX +/- .010	
.XXX +/- .005	

DO NOT SCALE DRAWING

**CABLESYS**

14700 E ALONDRA BLVD, LA MIRADA, CA 90638 WWW.CABLESYS.COM

FIBER JUMPER  
SINGLEMODE DUPLEX ST TO SC

DESIGNER	A.C.	SIZE	A	FILE NO.	OFF SHELF CABLE\FIBER\GCFAZTCSXX	REV.	C
DRAFTSMAN	H.W.	UNIT	MM	PAGE NO.	1/1	ITEM NO.	GCFAZTCSXX
APPROVED BY		SCALE	NTS	DATE	10/23/08	DWG NO.	FAZTCSXX

Approved by: \_\_\_\_\_ Title: \_\_\_\_\_ Date: \_\_\_\_\_