



REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	04/13/07	
B	MODIFY SPEC.	05/12/09	
C	MODIFY LENGTH	10/06/09	

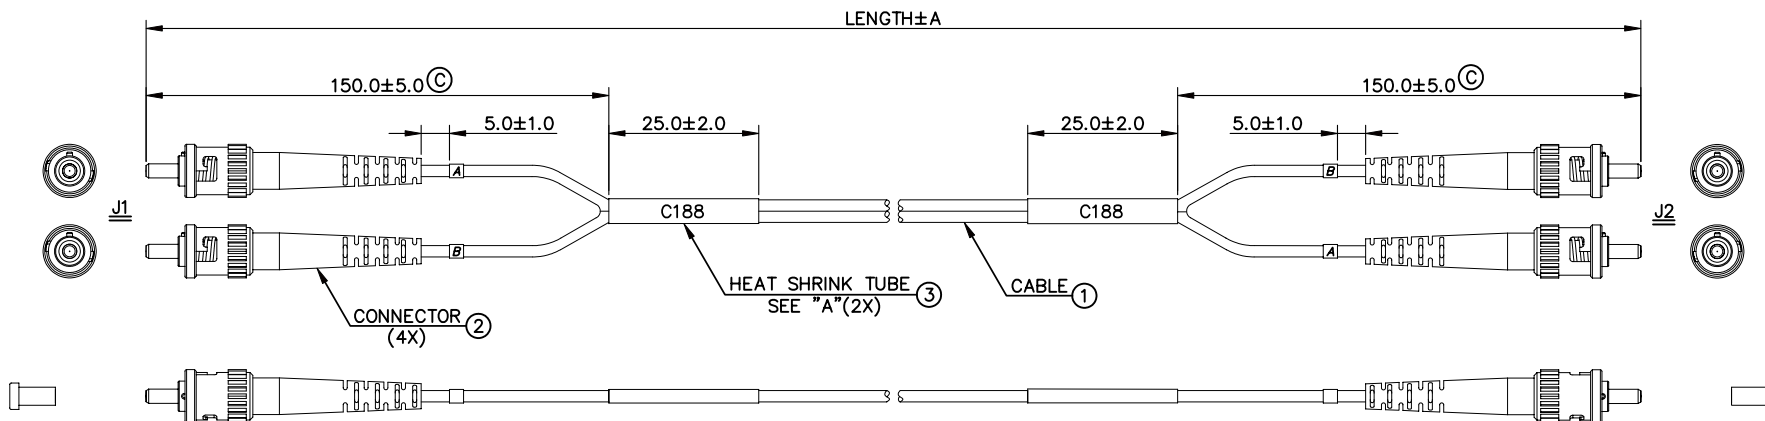

DETAIL "A"

TOLERANCE

6~**	0.15
3~5	0.10
2	0.05
0.6~1	0.04
0~0.5	0.03
LENGTH(M)	A(M)

GCFAZTTS**-M	**
GCFAZTTS01-M	1
CABLESYS P/N	LENGTH (M)

NOTE: "**": 01,02,03...

B	_____	A
A	_____	B
J1	WIRE COLOR	J2
WIRE CONNECTION		

ⓑ NOTES:

1. NEW PRODUCTS SHALL BE REFERENCE TO BELLCORE GR-326 STANDARD.
2. INSERTION LOSS: <=0.2dB TYPICAL (1300nm) 0.3dB MAX.
3. RETURN LOSS: >=55dB (1310nm)

NO.	ITEM	Q'TY	DESCRIPTION
3	HEAT SHRINK TUBE	2PCS	COLOR=BLACK.
2	CONNECTOR	4PCS	ST, SIMPLEX, SINGLE-MODE, YELLOW BOOTS.
1	CABLE	1PC	OPTICAL FIBER, SINGLE-MODE, 9/125, DUPLEX, Ø2.0MM, TIGHT, YELLOW, PVC JACKET.

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE		CABLESYS		14700 E ALONDRA BLVD, LA MIRADA, CA 90638		WWW.CABLESYS.COM		
DECIMALS	ANGULAR	DO NOT SCALE DRAWING						
.X	+/- .050							
.XX	+/- .010							
.XXX	+/- .005							
DESIGNER		A.C.	SIZE	A	FILE NO.	OFF SHELF CABLE\FIBER\GCFAZTTSXX-M	REV.	C
DRAFTSMAN		H.W.	UNIT	MM	PAGE NO.	1/1	ITEM NO.	GCFAZTTSXX-M
APPROVED BY			SCALE	NTS	DATE	04/13/07	DWG NO.	FAZTTSXX-M

Approved by: _____ Title: _____ Date: _____