



REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	12/20/07	
B	MODIFY LENGTH	08/21/09	
C	MODIFY CABLE DESCRIPTION	09/10/10	

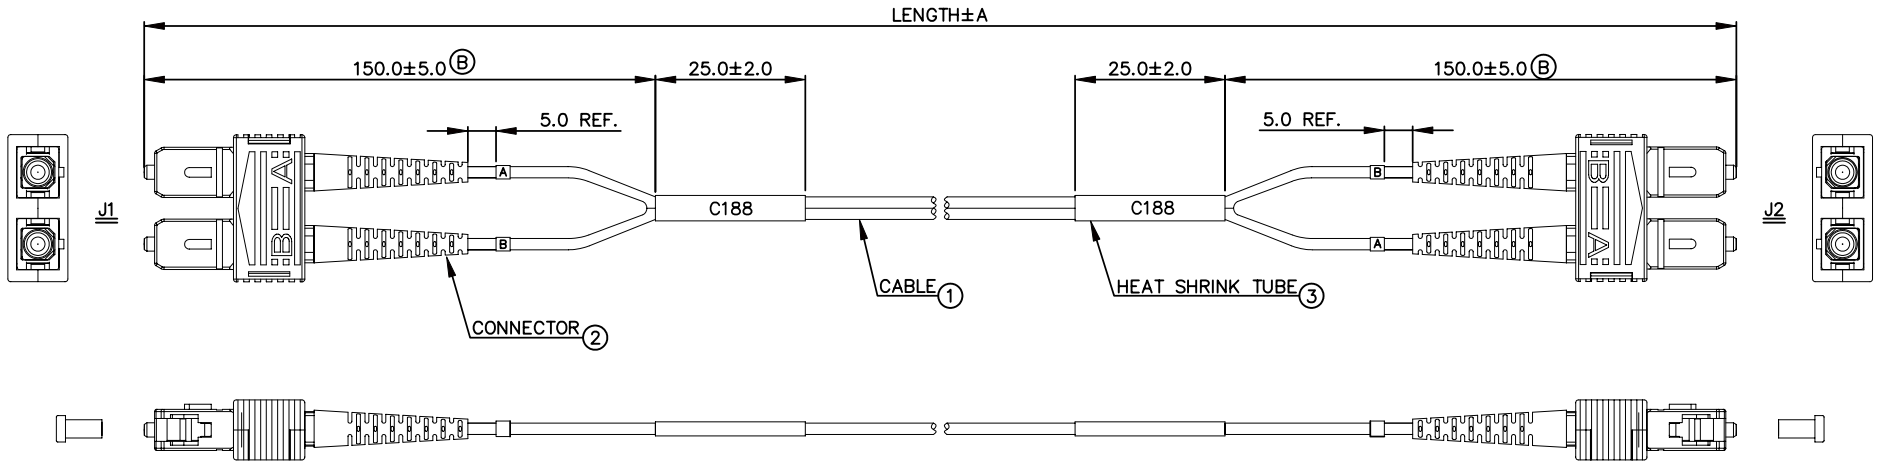

DETAIL "A"

TOLERANCE

6~**	0.15
3~5	0.10
2	0.05
0.6~1	0.04
0~0.5	0.03
LENGTH(M)	A(M)

GCFGZCCL**~M	**
GCFGZCCL01~M	1
CABLESYS P/N	LENGTH (M)

NOTE: "***": 01,02,03...

B	_____	A
A	_____	B
J1	WIRE COLOR	J2
WIRE CONNECTION		

NOTES:

1. NEW PRODUCTS SHALL BE REFERENCE TO BELLCORE GR-326 STANDARD.
2. INSERTION LOSS: <=0.2dB TYPICAL (1300nm)

3	HEAT SHRINK TUBE	2PCS	COLOR=BLACK.
2	CONNECTOR	2PCS	SC, DUPLEX, MULTI-MODE, BLUE HOUSING & BOOTS & CLIP
1	CABLE	1PC	OPTICAL FIBER, MULTI-MODE, OM3, 50/125, DUPLEX, Ø1.8MM, TIGHT, AQUA BLUE, PVC JACKET.
NO.	ITEM	Q'TY	DESCRIPTION

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE

DECIMALS	ANGULAR
.X +/- .050	+/- 0.5
.XX +/- .010	
.XXX +/- .005	

DO NOT SCALE DRAWING

CABLESYS

14700 E ALONDR A BLVD, LA MIRADA, CA 90638 WWW.CABLESYS.COM

FIBER JUMPER 50/125um MULTIMODE
DUPLEX SC TO SC OM3

DESIGNER	A.C.	SIZE	A	FILE NO.	OFF SHELF CABLE\FIBER\GCFGZCCLXX	REV.	C
DRAFTSMAN	H.W.	UNIT	MM	PAGE NO.	1/1	ITEM NO.	GCFGZCCLXX
APPROVED BY		SCALE	NTS	DATE	12/20/07	DWG NO.	FGZCCLXX

Approved by: _____ Title: _____ Date: _____