


REV	DESCRIPTION	Date	APPROVED
L	FIX TOLERANCE ERROR	12/13/04	
M	ADD RED AND GREEN	03/27/06	
N	ADD ORANGE	09/28/06	
P	MODIFY TITLE BLOCK	06/14/07	
Q	MODIFY SPEC	03/27/08	
R	MODIFY SR	07/24/08	
S	MODIFY CABLE SPEC	08/27/08	

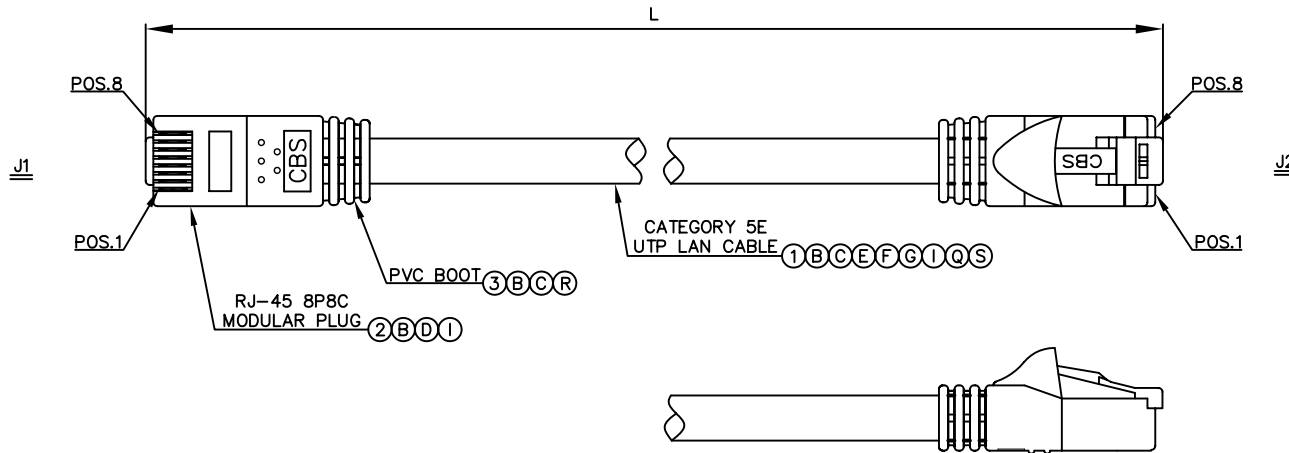

GCP08SS91C-XX	30480.0±127.0 (100'±5")
GCP08SS975-XX	22860.0±101.6 (75'±4")
GCP08SS950-XX	15240.0±101.6 (50'±4")
GCP08SS925-XX	7620.0±50.8 (25'±2")
GCP08SS920-XX	6096.0±50.8 (20'±2")
GCP08SS914-XX	4267.2±38.1 (14'±1.5")
GCP08SS910-XX	3048.0±38.1 (10'±1.5")
GCP08SS907-XX	2133.6±25.4 (7'±1")
GCP08SS905-XX	1524.0±25.4 (5'±1")
GCP08SS903-XX	914.4±25.4 (3'±1")
GCP08SS901-XX	304.8±12.7 (1'±0.5")
CBS P/N (XX: COLOR CODE)	DIM "L"

PART NUMBER TABLE (Q)

8	BROWN	TWISTED	8
7	WHITE/BROWN	PAIR	7
5	WHITE/BLUE	TWISTED	5
4	BLUE	PAIR	4
6	GREEN	TWISTED	6
3	WHITE/GREEN	PAIR	3
2	ORANGE	TWISTED	2
1	WHITE/ORANGE	PAIR	1
J1	WIRE COLOR		J2

WIRE CONNECTION TABLE (B)

BG	BEIGE
YL	YELLOW
WH	WHITE
RD	RED
OR	ORANGE
GY	GRAY
GN	GREEN
BL	BLUE
BK	BLACK
COLOR CODE	COLOR

COLOR TABLE (Q)

- NOTES:
1. ALL DIMENSIONS ARE: "MM".
 2. ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED.

(RCB)	3	PVC BOOT	2PCS	PVC. COLOR: SEE TABLE SHORE A: 75±3, UL94V-0
(LDB)	2	RJ-45 8P8C MODULAR PLUG	2SET	CONTACT: COPPER ALLOY 15u", GOLD PLATED INSULATOR: POLYCARBONATE, UL94V-2 COLOR: NATURAL WITH "CBS" MARKING
(SQIGFECB)	1	ENHANCE CATEGORY 5E UTP LAN CABLE	1PC	#24X4P+JACKET: PVC, O.D.=Ø5.3±0.2MM UL CM & CSA CMG FT4 FREQUENCY: 350MHZ COLOR: SEE TABLE JACKET MARKING AND ADDITIONAL INFO: SEE XPCS4PC9XX
No.	ITEM	Q'TY	DESCRIPTION	

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE					
DECIMALS ANGULAR .X +/- .050 +/- 0.5 .XX +/- .010 .XXX +/- .005		14700 E ALONDRA BLVD, LA MIRADA, CA 90638 WWW.CABLESYS.COM			
350MHZ ENHANCED PATCH CABLE WITH STRAIN RELIEF					
DESIGNER	T.L.	SIZE	A	FILE NO.	OFF SHELF CABLE\GCP08SS9LL-XX
DRAFTSMAN	H.W	UNIT	MM	PAGE NO.	1/1
APPROVED BY		SCALE	NTS	DATE	03/16/01
				ITEM NO.	GCP08SS9LL-XX
				DWG NO.	P08SS9LL-XX

Approved by: _____ Title: _____ Date: _____