



REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	01/22/08	

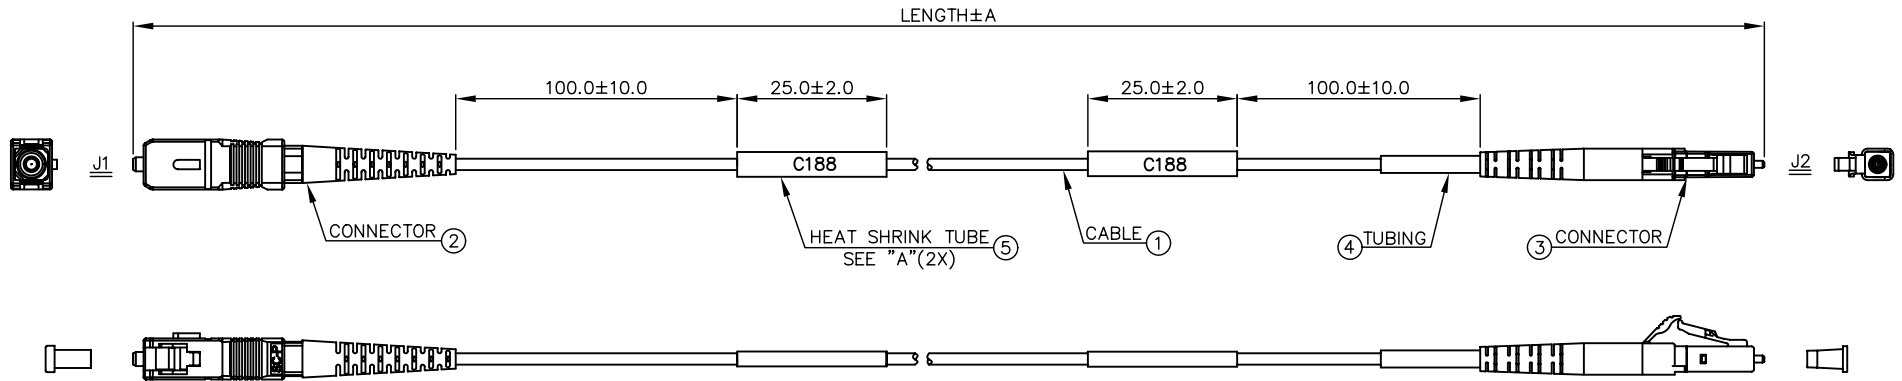

DETAIL "A"

TOLERANCE

6~**	0.15
3~5	0.10
2	0.05
0.6~1	0.04
0~0.5	0.03
LENGTH(M)	A(M)

GCFA1CLL**-M	**
GCFA1CLL01-M	1
CABLESYS P/N	LENGTH (M)

NOTE: "***": 01,02,03...

5	HEAT SHRINK TUBE	2PCS	COLOR=BLACK
4	TUBING	1PC	HEAT SHRINK SLEEVE, YELLOW
3	CONNECTOR	1PC	LC, SIMPLEX, MULTI-MODE, BEIGE HOUSING, WHITE BOOTS.
2	CONNECTOR	1PC	SC, SIMPLEX, MULTI-MODE, BLUE COUPLING & BOOTS.
1	CABLE	1PC	OPTICAL FIBER, MULTI-MODE, 50/125, SIMPLEX, Ø2.0MM, TIGHT, ORANGE, PVC JACKET.
NO.	ITEM	Q'TY	DESCRIPTION

NOTES:

1. NEW PRODUCTS SHALL BE REFERENCE TO BELLCORE GR-326 STANDARD.
2. INSERTION LOSS: <=0.2dB TYPICAL (1300nm)
3. CABLE MARKING: "PLUS CORNING MMF-50/125 OPTICAL FIBER CABLE OFNR(UL)E***** ***** M"

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE

DECIMALS	ANGULAR
.X +/- .050	+/- 0.5
.XX +/- .010	
.XXX +/- .005	

DO NOT SCALE DRAWING

CABLESYS

14700 E ALONDRA BLVD, LA MIRADA, CA 90638

WWW.CABLESYS.COM

FIBER JUMPER 50/125µm MULTIMODE
SIMPLEX SC TO LC

DESIGNER	A.C.	SIZE	A	FILE NO.	OFF SHELF	CABLE\FIBER\GCFA1CLLXX	REV.	A
DRAFTSMAN	H.W.	UNIT	MM	PAGE NO.	1/1	ITEM NO.	GCFA1CLLXX	
APPROVED BY		SCALE	NTS	DATE	01/22/08	DWG NO.	FA1CLLXX	

Approved by: _____ Title: _____ Date: _____