


REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	04/17/07	

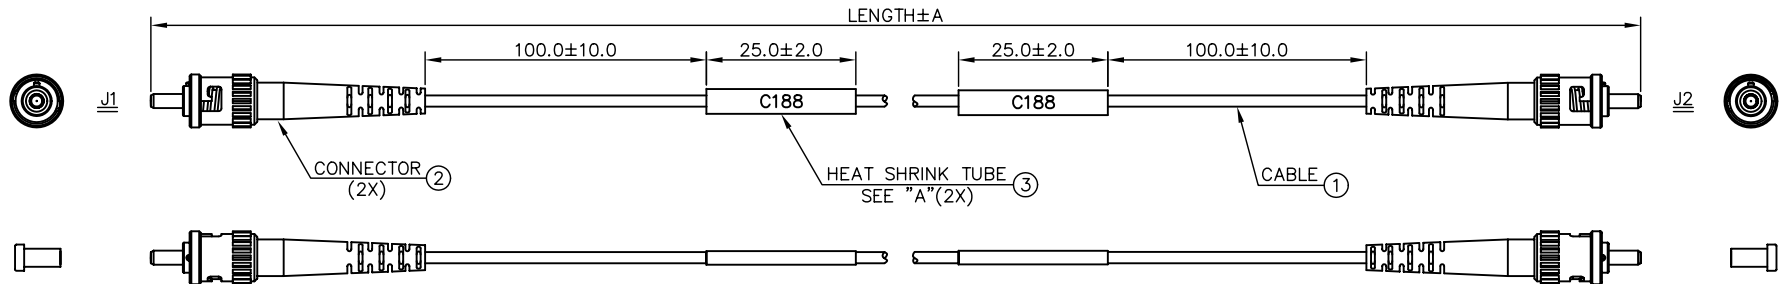


TOLERANCE

6~**	0.15
3~5	0.10
2	0.05
0.6~1	0.04
0~0.5	0.03
LENGTH(M)	A(M)

GCFA1TTL**~M	**
GCFA1TTL01~M	1
CABLESYS P/N	LENGTH (M)

NOTE: "**": 01,02,03...



DETAIL "A"

3	HEAT SHRINK TUBE	2PCS	COLOR=BLACK.
2	CONNECTOR	2PCS	ST, SIMPLEX, MULTI-MODE BLACK BOOT.
1	CABLE	1PC	OPTICAL FIBER, MULTI-MODE, 50/125, SIMPLEX, Ø2.0MM, TIGHT, ORANGE, PVC JACKET.
NO.	ITEM	Q'TY	DESCRIPTION

NOTES:

- NEW PRODUCTS SHALL BE REFERENCE TO BELLCORE GR-326 STANDARD.
- INSERTION LOSS: <=0.2dB TYPICAL (1300nm)
- CABLE MARKING: BAYCOM: "PLUS CORNING MMF-50/125 OPTICAL FIBER CABLE OFNR(UL)E201648 08/2006 *****"
KEY OPTICS: "PLUS CORNING MMF-50/125 OPTICAL FIBER CABLE OFNR(UL)E241104 08/2006 *****"

UNLESS OTHERWISE SPECIFIED
DIMENSION TOLERANCES ARE

DECIMALS	ANGULAR
.X +/- .050	+/- 0.5
.XX +/- .010	
.XXX +/- .005	

DO NOT SCALE DRAWING

CABLESYS

14700 E ALONDRA BLVD, LA MIRADA, CA 90638

WWW.CABLESYS.COM

FIBER JUMPER 50/125µm MULTIMODE
SIMPLEX ST TO ST

DESIGNER	A.C.	SIZE	A	FILE NO.	OFF SHELF CABLE\FIBER\GCFA1TTLXX~M	REV.	A
DRAFTSMAN	N.T.	UNIT	MM	PAGE NO.	1/1	ITEM NO.	GCFA1TTLXX~M
APPROVED BY		SCALE	NTS	DATE	04/17/07	DWG NO.	FA1TTLXX~M

Approved by: _____ Title: _____ Date: _____