


REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	05/01/07	

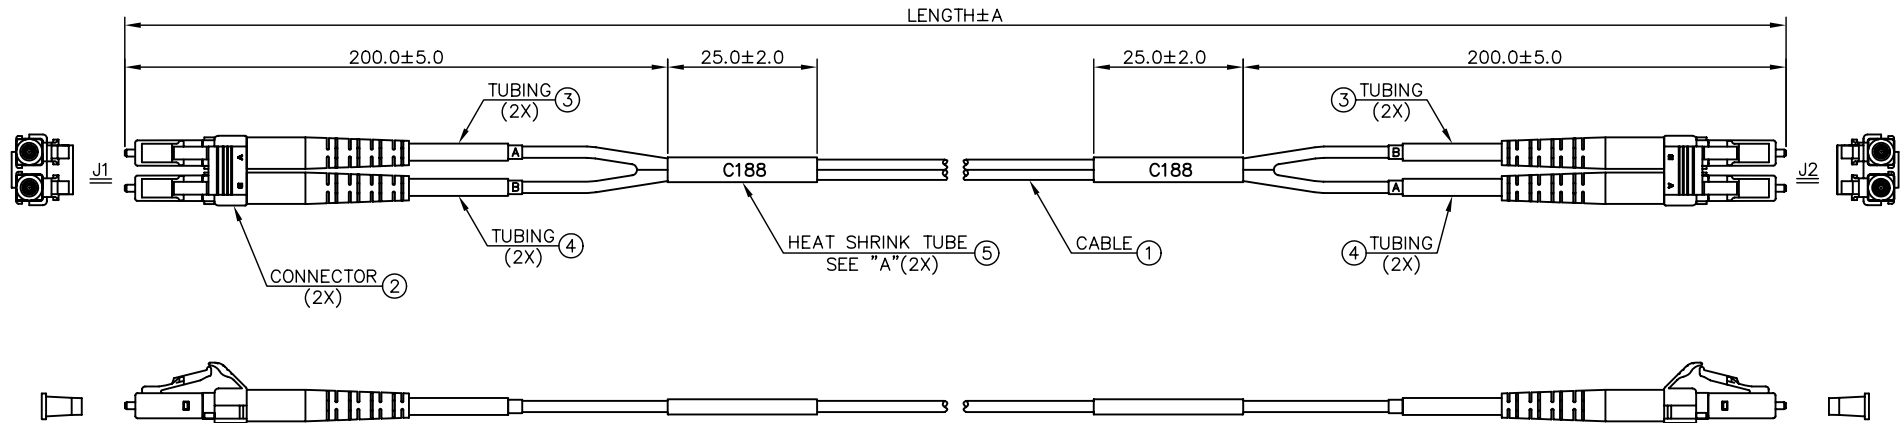

NOTE: CABLE LABEL IS ATTACHED TO PORT 1.


TOLERANCE

6~**	0.15
3~5	0.10
2	0.05
0.6~1	0.04
0~0.5	0.03
LENGTH(M)	A(M)

GCFAZLLL**-M	**
GCFAZLLL01-M	1
CABLESYS P/N	LENGTH (M)

NOTE: "\*\*": 01,02,03...

B	_____	A
A	_____	B
J1	WIRE COLOR	J2
WIRE CONNECTION		



DETAIL "A"

5	HEAT SHRINK TUBE	2PCS	COLOR=BLACK.
4	TUBING	2PCS	HEAT SHRINK SLEEVE, WHITE.
3	TUBING	2PCS	HEAT SHRINK SLEEVE, YELLOW.
2	CONNECTOR	2PCS	LC, DUPLEX, MULTI-MODE, BEIGE HOUSING, WHITE BOOTS
1	CABLE	1PC	OPTICAL FIBER, MULTI-MODE, 50/125, DUPLEX, Ø2.0MM TIGHT, ORANGE, PVC JACKET.
NO.	ITEM	Q'TY	DESCRIPTION

NOTES:

- NEW PRODUCTS SHALL BE REFERENCE TO BELLCORE GR-326 STANDARD.
- INSERTION LOSS: <=0.2dB TYPICAL (1300nm)
- CBALE MARKING: BAYCON: "PLUS CORNING MMF-50/125 OPTICAL FIBER CABLE OFNR(UL)E201648 05/2006 \*\*\*\*\* M"  
KEY OPTICS: "PLUS CORNING MMF-50/125 OPTICAL FIBER CABLE OFNR(UL)E241104 05/2006 \*\*\*\*\* M"

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE		<h1>CABLESYS</h1> <p>14700 E ALONDRA BLVD, LA MIRADA, CA 90638 <a href="http://WWW.CABLESYS.COM">WWW.CABLESYS.COM</a></p>	
DECIMALS	ANGULAR	FIBER JUMPER 50/125µm MULTIMODE DUPLEX LC TO LC	
.X	+/- .050	DESIGNER	A.C.
.XX	+/- .010	SIZE	A
.XXX	+/- .005	FILE NO.	OFF SHELF CABLE\FIBER\GCFAZLLLXX-M
DO NOT SCALE DRAWING		REVISION	REV. A
DRAFTSMAN	N.T.	UNIT	MM
APPROVED BY		PAGE NO.	1/1
		DATE	05/01/07
		ITEM NO.	GCFAZLLLXX-M
		DWG NO.	FAZLLLXX-M

Approved by: \_\_\_\_\_ Title: \_\_\_\_\_ Date: \_\_\_\_\_