



REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	01/15/08	

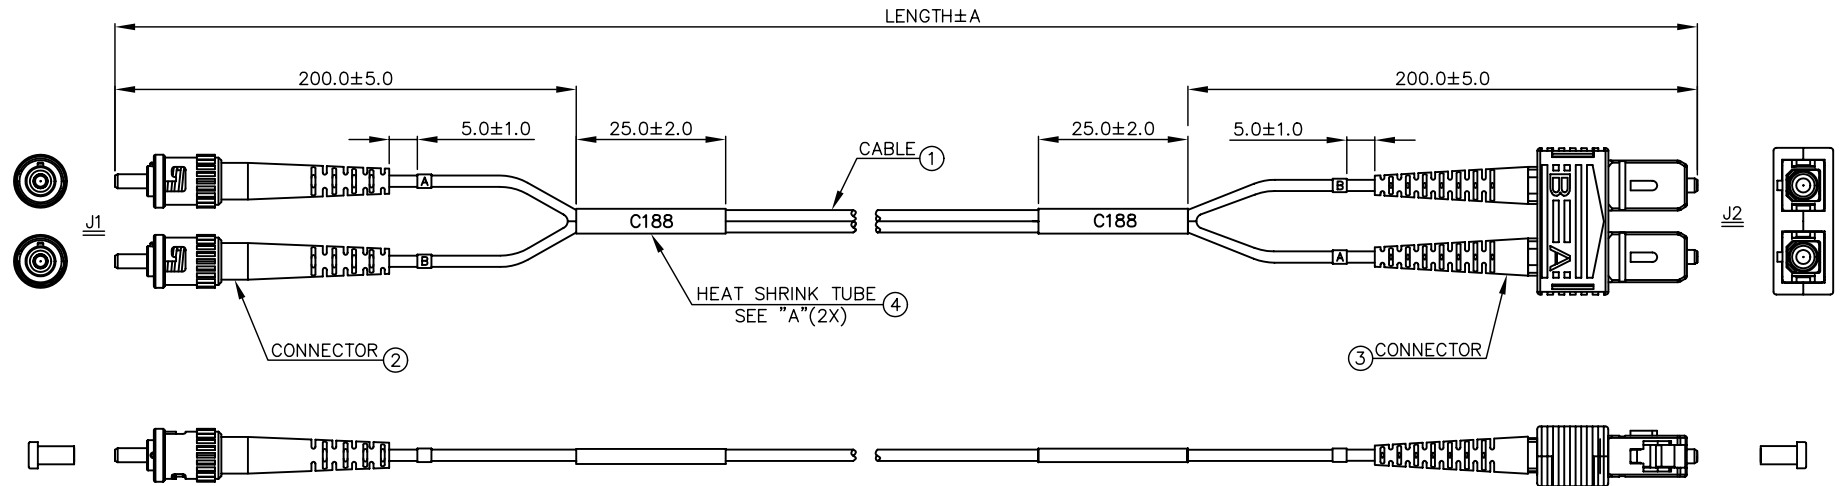

TOLERANCE

6~**	0.15
3~5	0.10
2	0.05
0.6~1	0.04
0~0.5	0.03
LENGTH(M)	A(M)

GCFAZTCL**-M	**
GCFAZTCL01-M	1
CABLESYS P/N	LENGTH (M)

NOTE: "\*\*": 01,02,03...

B	_____	A
A	_____	B
J1	_____	J2
WIRE COLOR		WIRE CONNECTION

4	HEAT SHRINK TUBE	2PCS	COLOR=BLACK.
3	CONNECTOR	1PC	SC, DUPLEX, MULTI-MODE, BLUE COUPLING & BOOTS & CLIP
2	CONNECTOR	2PCS	ST, DUPLEX, MULTI-MODE, BLACK BOOTS.
1	CABLE	1PC	OPTICAL FIBER, MULTI-MODE, 50/125, DUPLEX, Ø2.0MM TIGHT, ORANGE, PVC JACKET.
NO.	ITEM	Q'TY	DESCRIPTION

NOTES:

- NEW PRODUCTS SHALL BE REFERENCE TO BELLCORE GR-326 STANDARD.
- INSERTION LOSS: <=0.2dB TYPICAL (1300nm)
- CABLE MARKING: BAYCON: "PLUS CORNING MMF-50/125 OPTICAL FIBER CABLE OFNR(UL)E201648 07/2006 \*\*\*\*\* M"  
KEY OPTICS: "PLUS CORNING MMF-50/125 OPTICAL FIBER CABLE OFNR(UL)E241104 07/2006 \*\*\*\*\* M"

UNLESS OTHERWISE SPECIFIED  
DIMENSION TOLERANCES ARE

DECIMALS	ANGULAR
.X	+/- .050
.XX	+/- .010
.XXX	+/- .005

DO NOT SCALE DRAWING

**CABLESYS**

14700 E ALONDRA BLVD, LA MIRADA, CA 90638

WWW.CABLESYS.COM

FIBER JUMPER 50/125µm MULTIMODE  
DUPLEX ST TO SC

DESIGNER	A.C.	SIZE	A	FILE NO.	OFF SHELF CABLE/FIBER/GCFAZTCLXX	REV.	A
DRAFTSMAN	H.W.	UNIT	MM	PAGE NO.	1/1	ITEM NO.	GCFAZTCLXX
APPROVED BY		SCALE	NTS	DATE	01/15/08	DWG NO.	FAZTCLXX

Approved by: \_\_\_\_\_ Title: \_\_\_\_\_ Date: \_\_\_\_\_