



| REV | DESCRIPTION | Date | APPROVED |
|-----|--------------------|----------|----------|
| A | PRODUCTION RELEASE | 04/13/07 | |

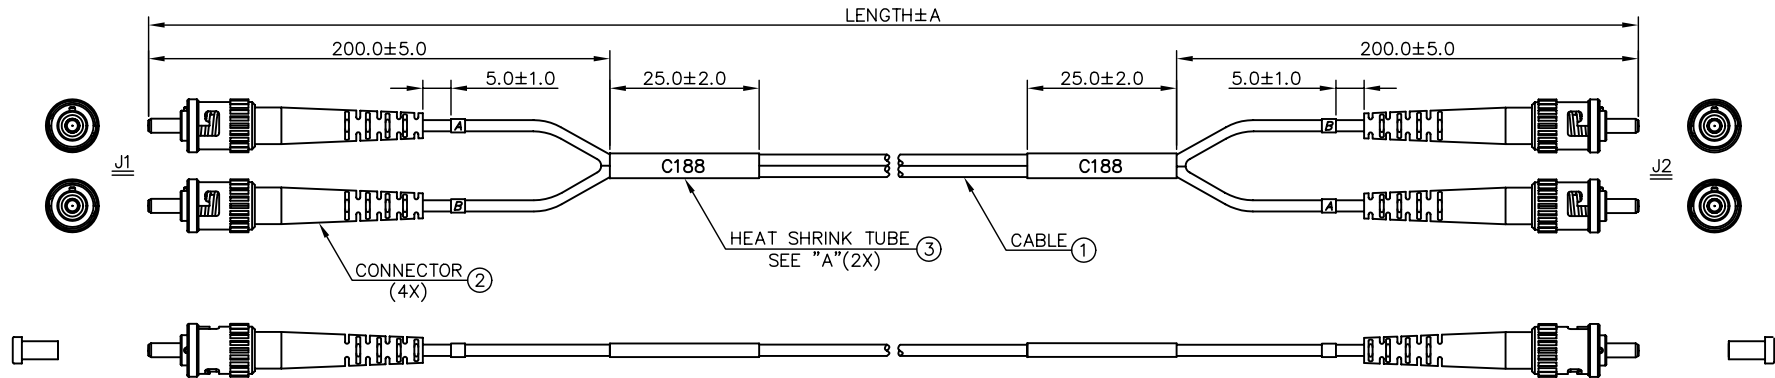

DETAIL "A"

TOLERANCE

| | |
|-----------|------|
| 6~** | 0.15 |
| 3~5 | 0.10 |
| 2 | 0.05 |
| 0.6~1 | 0.04 |
| 0~0.5 | 0.03 |
| LENGTH(M) | A(M) |

| | |
|--------------|------------|
| GCFAZTTL**-M | ** |
| GCFAZTTL01-M | 1 |
| CABLESYS P/N | LENGTH (M) |

NOTE: "**": 01,02,03...

| | | |
|----|-----------------|----|
| B | _____ | A |
| A | _____ | B |
| J1 | WIRE COLOR | J2 |
| | WIRE CONNECTION | |

| | | | |
|-----|------------------|------|---|
| 3 | HEAT SHRINK TUBE | 2PCS | COLOR=BLACK. |
| 2 | CONNECTOR | 4PCS | ST, SIMPLEX, MULTI-MODE, BLACK BOOTS. |
| 1 | CABLE | 1PC | OPTICAL FIBER, MULTI-MODE, 50/125, DUPLEX, Ø2.0MM, TIGHT, ORANGE, PVC JACKET. |
| NO. | ITEM | Q'TY | DESCRIPTION |

NOTES:

1. NEW PRODUCTS SHALL BE REFERENCE TO BELLCORE GR-326 STANDARD.
2. INSERTION LOSS: <=0.2dB TYPICAL (1300nm)
3. CABLE MARKING: BAYCON: "PLUS CORNING MMF-50/125 OPTICAL FIBER CABLE OFNR(UL)E201648 09/2006 ***** M"
KEY OPTICS: "PLUS CORNING MMF-50/125 OPTICAL FIBER CABLE OFNR(UL)E241104 09/2006 ***** M"

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE

| DECIMALS | ANGULAR |
|---------------|---------|
| .X +/- .050 | +/- 0.5 |
| .XX +/- .010 | |
| .XXX +/- .005 | |

DO NOT SCALE DRAWING

CABLESYS

14700 E ALONDRA BLVD, LA MIRADA, CA 90638

WWW.CABLESYS.COM

FIBER JUMPER 50/125µm MULTIMODE
DUPLEX ST TO ST

| | | | | | | | |
|-------------|------|-------|-----|----------|------------------------------------|----------|--------------|
| DESIGNER | A.C. | SIZE | A | FILE NO. | OFF SHELF CABLE\FIBER\GCFAZTTLXX-M | REV. | A |
| DRAFTSMAN | N.T. | UNIT | MM | PAGE NO. | 1/1 | ITEM NO. | GCFAZTTLXX-M |
| APPROVED BY | | SCALE | NTS | DATE | 04/13/07 | DWG NO. | FAZTTLXX-M |

Approved by: _____ Title: _____ Date: _____