



REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	12/20/07	

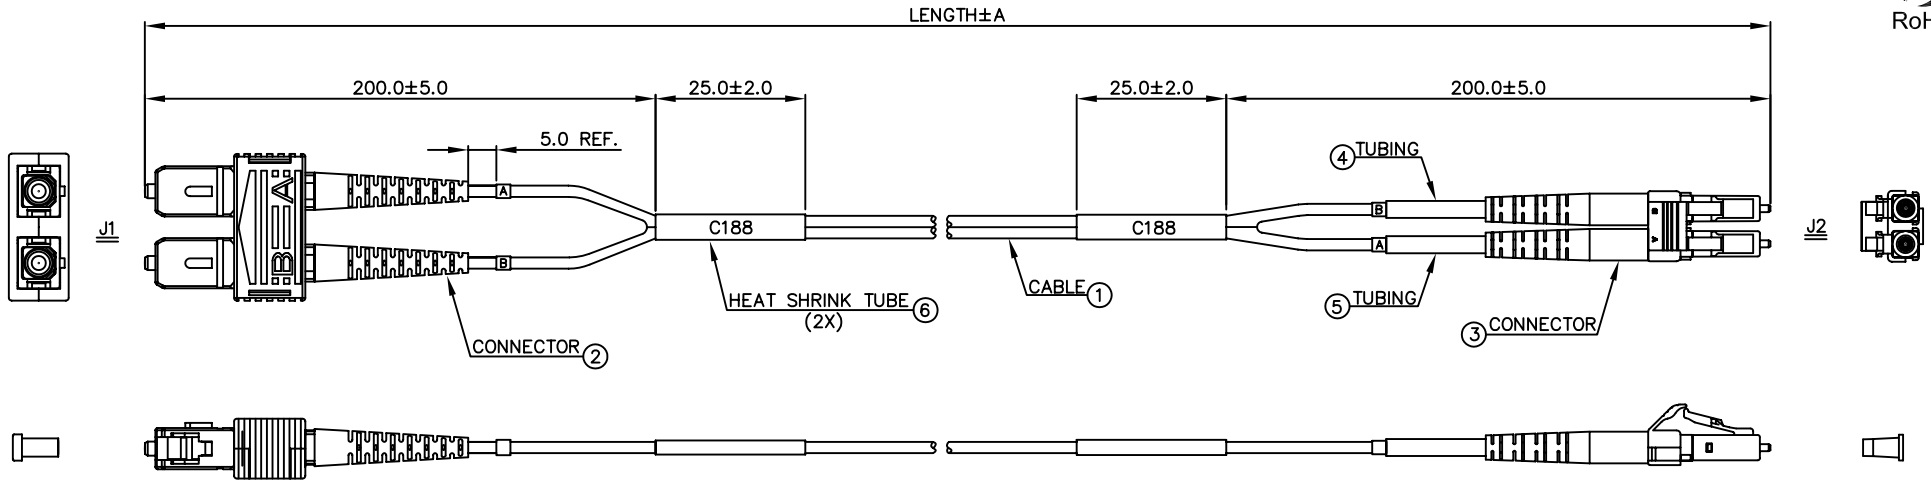

DETAIL "A"

TOLERANCE

6~**	0.15
3~5	0.10
2	0.05
0.6~1	0.04
0~0.5	0.03
LENGTH(M)	A(M)

GCFGZCLL**~M	**
GCFGZCLL01~M	1
CABLESYS P/N	LENGTH (M)

NOTE: "***": 01,02,03...

B	_____	A
A	_____	B
J1	WIRE COLOR	J2
WIRE CONNECTION		

NO.	ITEM	Q'TY	DESCRIPTION
6	HEAT SHRINK TUBE	2PCS	COLOR=BLACK.
5	TUBING	1PC	HEAT SHRINK SLEEVE, WHITE
4	TUBING	1PC	HEAT SHRINK SLEEVE, YELLOW
3	CONNECTOR	1PC	LC, DUPLEX, MULTI-MODE, BEIGE HOUSING, WHITE BOOT
2	CONNECTOR	1PC	SC, DUPLEX, MULTI-MODE, BLUE HOUSING & BOOTS & CLIP
1	CABLE	1PC	OPTICAL FIBER, MULTI-MODE, OM3, 50/125, DUPLEX, Ø1.8MM, TIGHT, OFNR, AQUA BLUE.

NOTES:

- NEW PRODUCTS SHALL BE REFERENCE TO BELLCORE GR-326 STANDARD.
- INSERTION LOSS: <=0.2dB TYPICAL (1300nm)
- CABLE MARKING: BAYCON: "PLUS CORNING OM3-50/125 OPTICAL FIBER CABLE OFNR 02/2007 ***** M"
KEY OPTICS: "PLUS CORNING OM3-50/125 OPTICAL FIBER CABLE OFNR 02/2007 ***** M"

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE

DECIMALS	ANGULAR
.X +/- .050	+/- 0.5
.XX +/- .010	
.XXX +/- .005	

DO NOT SCALE DRAWING

DESIGNER	A.C.	SIZE	A	FILE NO.	OFF SHELF CABLE\FIBER\GCFGZCLLXX	REV.	A
DRAFTSMAN	H.W.	UNIT	MM	PAGE NO.	1/1	ITEM NO.	GCFGZCLLXX
APPROVED BY		SCALE	NTS	DATE	12/20/07	DWG NO.	FGZCLLXX

CABLESYS

14700 E ALONDRA BLVD, LA MIRADA, CA 90638

WWW.CABLESYS.COM

FIBER JUMPER 50/125µm MULTIMODE
DUPLEX SC TO LC OM3

Approved by: _____ Title: _____ Date: _____