


REV	DESCRIPTION	DATE	APPROVED
A	PRODUCTION RELEASE	11/03/03	
B	MODIFY WIRING	11/17/03	

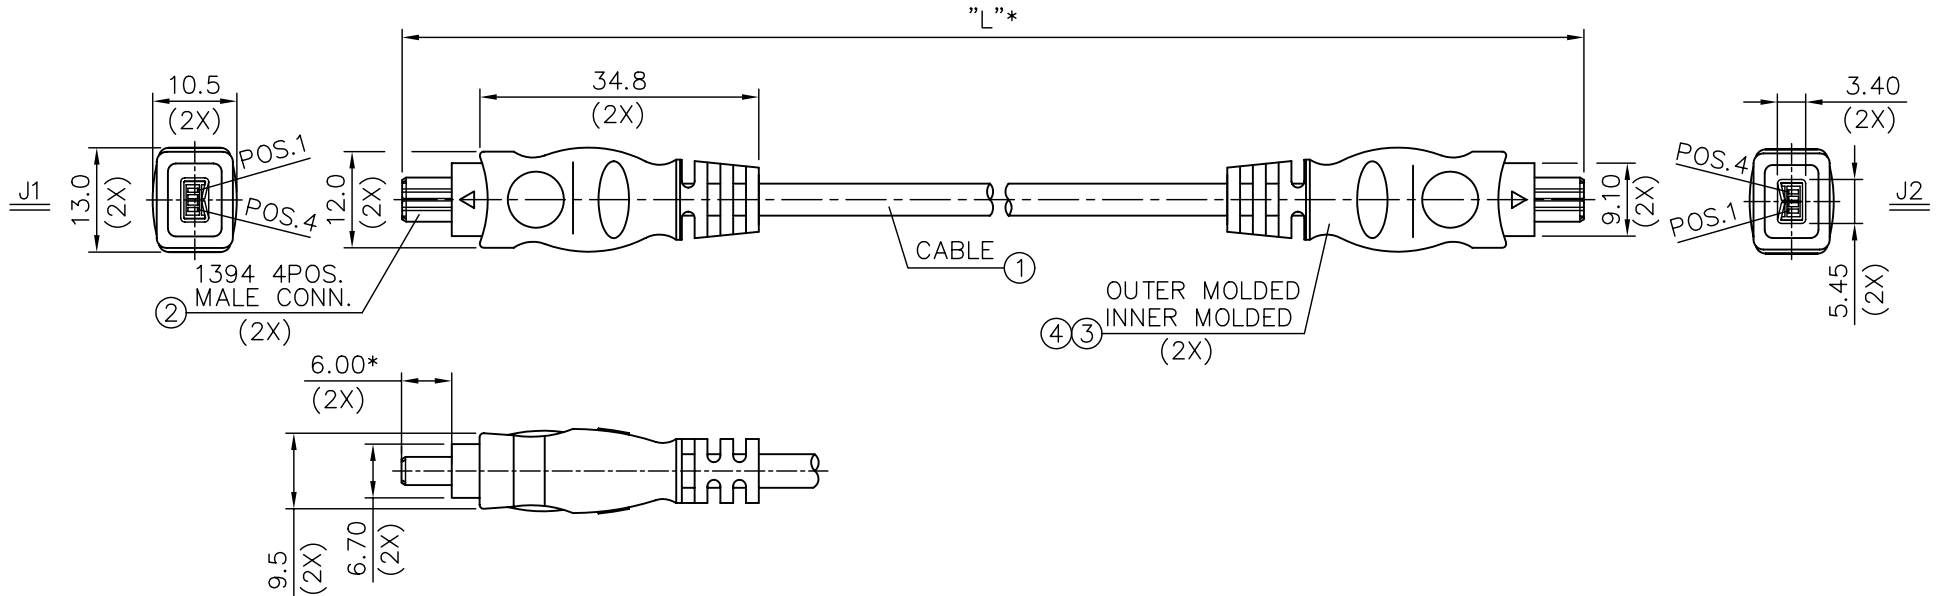

SHELL	BRAID	SHELL
4	ORANGE	2
3	BLUE	1
2	RED	4
1	GREEN	3
J1	WIRE COLOR	J2

WIRE CONNECTION TABLE (B)

GC43813005	5000.0±76.2
GC43813003	3000.0±50.8
GC43813002	2000.0±50.8
GC43813001	1000.0±38.1
PART NO.	"L"*

NOTES:

1. ALL DIMENSIONS ARE "MM".
2. ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED.
3. CIRRISS 1000H OR EQUIVALENT CABLE TESTER USING FOLLOWING PARAMETERS: 300V DC, 50MΩ 10mS MIN. & 2.0Ω MAX.

4	OUTER MOLDED	6.4gm	PVC, SHORE A: 85±3 UL94V-0 COLOR: BLACK(600-BLK-001)
3	INNER MOLDED	2.1gm	PE, FOR MOLDED, COLOR: NATURAL
2	1394 4POS. MALE CONN.	2SET	CONTACT: 30u" GOLD PLATED INSULATOR: PBT, COLOR: BLACK, UL94V-0 SHIELD CASE: GOLD PLATED
1	IEEE 1394 CABLE	1PC	#32X2P+AL./MYLAR+BRAID COVERAGE: 80% MIN. +JACKET: PVC, O.D=Ø4.0±0.1MM, UL20379 COLOR: BLACK(600-BLK-001)
NO.	ITEM.	Q'TY	DESCRIPTION

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE

DECIMALS	ANGULAR
.X +/- .050	+/- 0.5
.XX +/- .010	
.XXX +/- .005	

DO NOT SCALE DRAWING

CABLESYS

14700 E ALONDRA BLVD, LA MIRADA, CA 90638

WWW.CABLESYS.COM

1394 FIRE WIRE 4P TO 4P W/ GOLD PLATED SHELLS

DESIGNER	T.L.	SIZE	A	FILE NO.	OFF SHELF CABLE\GC43813XXX	REV.	B
DRAFTSMAN	U.P.	UNIT	MM	PAGE NO.	1/1	ITEM NO.	GC43813XXX
APPROVED BY		SCALE	NTS	DATE	11/03/03	DWG NO.	43813XXX

Approved by: _____ Title: _____ Date: _____