



REV	DESCRIPTION	Date	APPROVED
C	UPDATE TITLE BLOCK	06/07/07	
D	MODIFY SPEC	03/27/08	
E	MODIFY CABLE MARKING	04/22/08	
F	MODIFY CABLE SPEC	08/26/08	

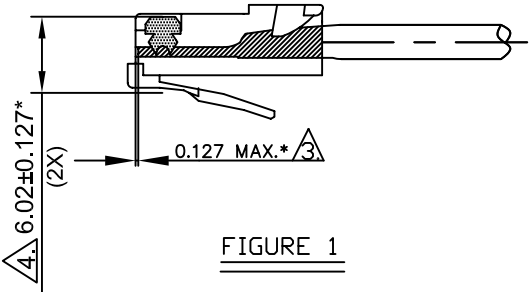

GCP088861C-XX	30480.0±127.0 (100'±5")
GCP0888675-XX	22860.0±101.6 (75'±4")
GCP0888650-XX	15240.0±101.6 (50'±4")
GCP0888625-XX	7620.0±50.8 (25'±2")
GCP0888620-XX	6096.0±50.8 (20'±2")
GCP0888614-XX	4267.2±38.1 (14'±1.5")
GCP0888610-XX	3048.0±38.1 (10'±1.5")
GCP0888607-XX	2133.6±25.4 (7'±1")
GCP0888605-XX	1524.0±25.4 (5'±1")
GCP0888603-XX	914.4±25.4 (3'±1")
GCP0888601-XX	304.8±12.7 (1'±0.5")
CBS P/N (XX: COLOR CODE)	DIM "L"

PART NUMBER TABLE

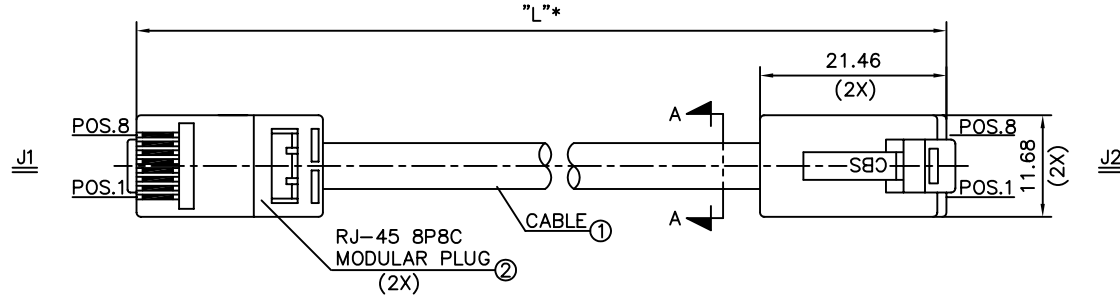

SEC. A-A

FIGURE 1

8	BROWN	TWISTED	8
7	WHITE/BROWN	PAIR	7
5	WHITE/BLUE	TWISTED	5
4	BLUE	PAIR	4
6	GREEN	TWISTED	6
3	WHITE/GREEN	PAIR	3
2	ORANGE	TWISTED	2
1	WHITE/ORANGE	PAIR	1
J1	WIRE COLOR		J2

WIRE CONNECTION TABLE

YL	YELLOW
WH	WHITE
RD	RED
OR	ORANGE
GY	GRAY
GN	GREEN
BL	BLUE
BK	BLACK
COLOR CODE	COLOR

COLOR TABLE

2	8P8C MODULAR PLUG	2SET	CONTACT: COPPER ALLOY 50u", GOLD PLATED INSULATOR: POLYCARBONATE, UL94V-2 COLOR: NATURAL
1	CATEGORY 6 UTP CABLE	1PC	#24X4P+JACKET: PVC, O.D.=Ø6.2±0.2MM UL CM & CSA CMG FT4 FREQUENCY: 450MHZ COLOR: SEE TABLE JACKET MARKING AND ADDITIONAL INFO: SEE XPCS4PC6XX
No.	ITEM	Q'TY	DESCRIPTION

FECB

NOTES:

- ALL DIMENSIONS ARE: "MM".
- ANY OPEN, MISWIRING, SHORT & INTERMITTENT ARE NOT PERMITTED.
- THE CONDUCTOR SHALL BE BOTTOMER IN THE CONNECTOR WITHIN THE LIMITS SHOWN IN FIGURE 1.
- THE CRIMP HEIGHT SHALL BE 6.02±0.127 AND MEASURED AT THE LOCATION INDICATED IN FIGURE 1.

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE		<b>CABLESYS</b>			
DECIMALS .X +/- .050 .XX +/- .010 .XXX +/- .005		14700 E ALONDR A BLVD, LA MIRADA, CA 90638 <a href="http://WWW.CABLESYS.COM">WWW.CABLESYS.COM</a>			
ANGULAR +/- .05		CAT6 PATCH CABLE			
DO NOT SCALE DRAWING					
DESIGNER	T.L.	SIZE	A	FILE NO.	OFF SHELF CABLE\GCP08886LL-XX
DRAFTSMAN	H.W.	UNIT	MM	PAGE NO.	1/1
APPROVED BY		SCALE	NTS	DATE	04/11/06
				ITEM NO.	GCP08886LL-XX
				DWG NO.	P08886LL-XX

Approved by: \_\_\_\_\_ Title: \_\_\_\_\_ Date: \_\_\_\_\_