

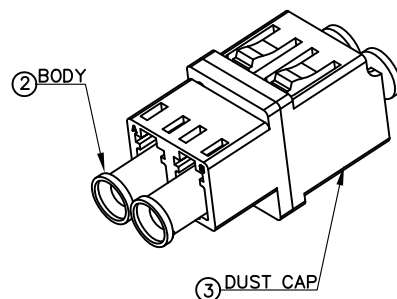





© 2007 CABLESYS, "GLOBAL MANUFACTURING SOLUTIONS, LLC". THIS DOCUMENT AND THE DESIGNS, SPECIFICATIONS AND INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF CABLESYS. REPRODUCTION, MODIFICATION, ALTERATION, OR UNAUTHORIZED USE WITHOUT CABLESYS' APPROVAL IS STRICTLY PROHIBITED. THE CABLESYS TRADENAME AND LOGO ARE TRADEMARKS OF CABLESYS. ALL RIGHTS RESERVED.


REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	11/06/07	
B	ADD PANEL MOUNTING IF70	11/24/07	
C	MODIFY BODY SHAPE	11/30/11	



RECOMMENDED MOUNTING HOLE (PANEL THICKNESS IS 1.7 MM MAX.)

NOTES:

1. WAVELENGTH: (850nm,1310nm)
1. INSERTION LOSS: CERAMIC <=0.15dB, METAL <=0.2dB
2. RETENTIONS FORCE: 100~300grams
3. DURABILITY: 500MATING
4. OPERATING TEMPERATURE: -40°C~80°C
5. FLAMMABILITY GRADE: UL94V-0

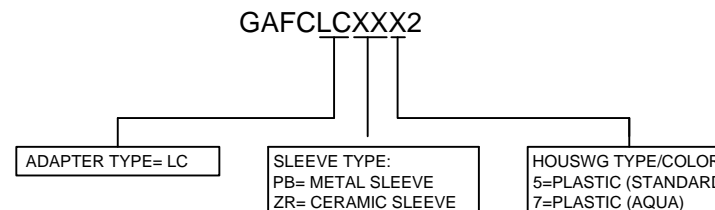

GHFCLCPB72	2	METAL	2	AQUA	PLASTIC(SQUARE)	4	WHITE	
GAFCLCZR52	2	CERAMIC	2	BLUE	PLASTIC(SQUARE)	4	WHITE	
GAFCLCPB52	2	METAL	2	BEIGE	PLASTIC(SQUARE)	4	WHITE	
ITEM NO.	Q'TY	TYPE	Q'TY	COLOR	TYPE	Q'TY	COLOR	
BOM	①	SLEEVE		②	BODY		③	DUST CAP

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE

DECIMALS .X +/- .050 .XX +/- .010 .XXX +/- .005
ANGULAR +/- 0.5

DO NOT SCALE DRAWING

CABLESYS

16800 Edwards Road, Cerritos, CA 90703 Tel (562) 356-3222 Fax (562) 356-3200

LC DUPLEX, ADAPTER

DESIGNER	MEIXIANG	SIZE	A	FILE NO.	OFF SHELF CABLE/FIBER/GAFCLCXXX2	REV.	C
DRAFTSMAN	J.L.	UNIT	MM	PAGE NO.	1/1	ITEM NO.	GAFCLCXXX52
APPROVED BY		SCALE	NTS	DATE	11/06/07	DWG NO.	FCLCXXX52

Approved by: _____ Title: _____ Date: _____