


REV	DESCRIPTION	Date	APPROVED
A	PRODUCTION RELEASE	05/26/06	

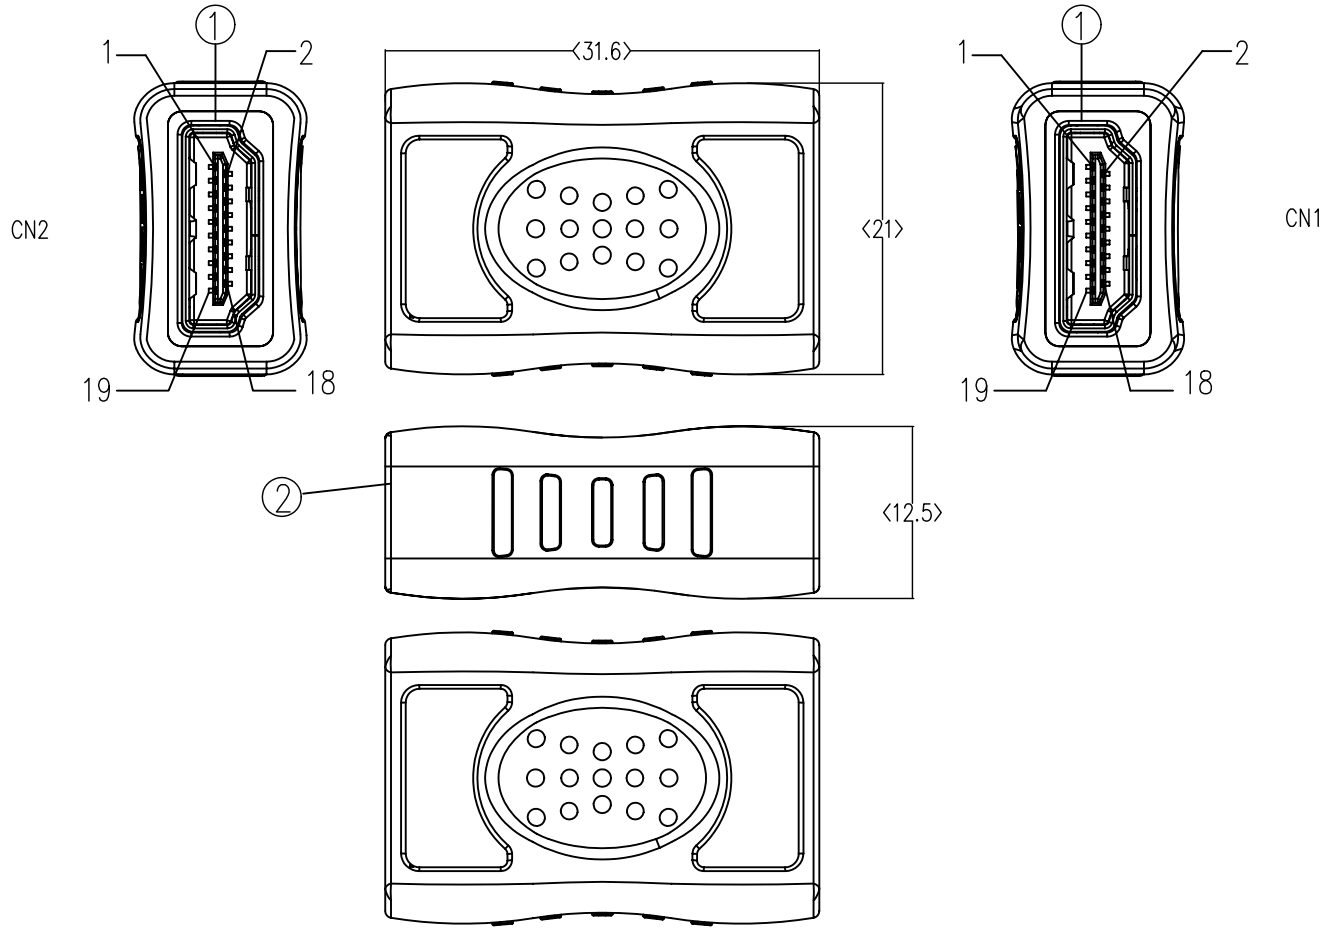

CN2	SIGNAL NAME	CN1
1	TMDS DATA2+	1
2	TMDS DATA2 SHIELD	2
3	TMDS DATA2-	3
4	TMDS DATA1+	4
5	TMDS DATA1 SHIELD	5
6	TMDS DATA1-	6
7	TMDS DATA0+	7
8	TMDS DATA0 SHIELD	8
9	TMDS DATA0-	9
10	TMDS CLOCK+	10
11	TMDS CLOCK SHIELD	11
12	TMDS CLOCK-	12
13	CEC	13
14	RESERVED (IN CABLE BUT N.C. ON DEVICE)	14
15	SCL	15
16	SDA	16
17	DDC/CEC GROUND	17
18	+5V POWER	18
19	HOT PLUG DETECT	19
SHELL	GROUND	SHELL

ITEM	BOM DESCRIPTIONS	QTY
2	PVC BLACK UL 94V-0	1
1	HDMI A TYPE 19P/F ACON P/N: HMS20-AK5300 GOLD PLANTED	2

NOTES

- 100% OPEN SHORT MIS-WIRE TEST  
INSULATION RESISTANCE 200VDC 10MGA OHM MIN  
CONDUCTOR RESISTANCE 2 OHM MAX; HI-POT: 300VAC FOR 10mS  
INSTANTANEOUS OPEN/SHORT :1 SEC

UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE		 14700 E ALONDRA BLVD, LA MIRADA, CA 90638    WWW.CABLESYS.COM					
DECIMALS	ANGULAR						
.X    +/- .050	+/- 0.5	HDMI F/F ADAPTER					
.XX   +/- .010							
.XXX +/- .005		DO NOT SCALE DRAWING					
DESIGNER	T.L.	SIZE	A	FILE NO.	OFF SHELF\GC77735888	REV.	A
DRAFTSMAN	A.C.	UNIT	MM	PAGE NO.	1/1	ITEM NO.	GC77735888
APPROVED BY		SCALE	NTS	DATE	05/26/06	DWG NO.	77735888

Approved by: \_\_\_\_\_ Title: \_\_\_\_\_ Date: \_\_\_\_\_